

FIG. 1

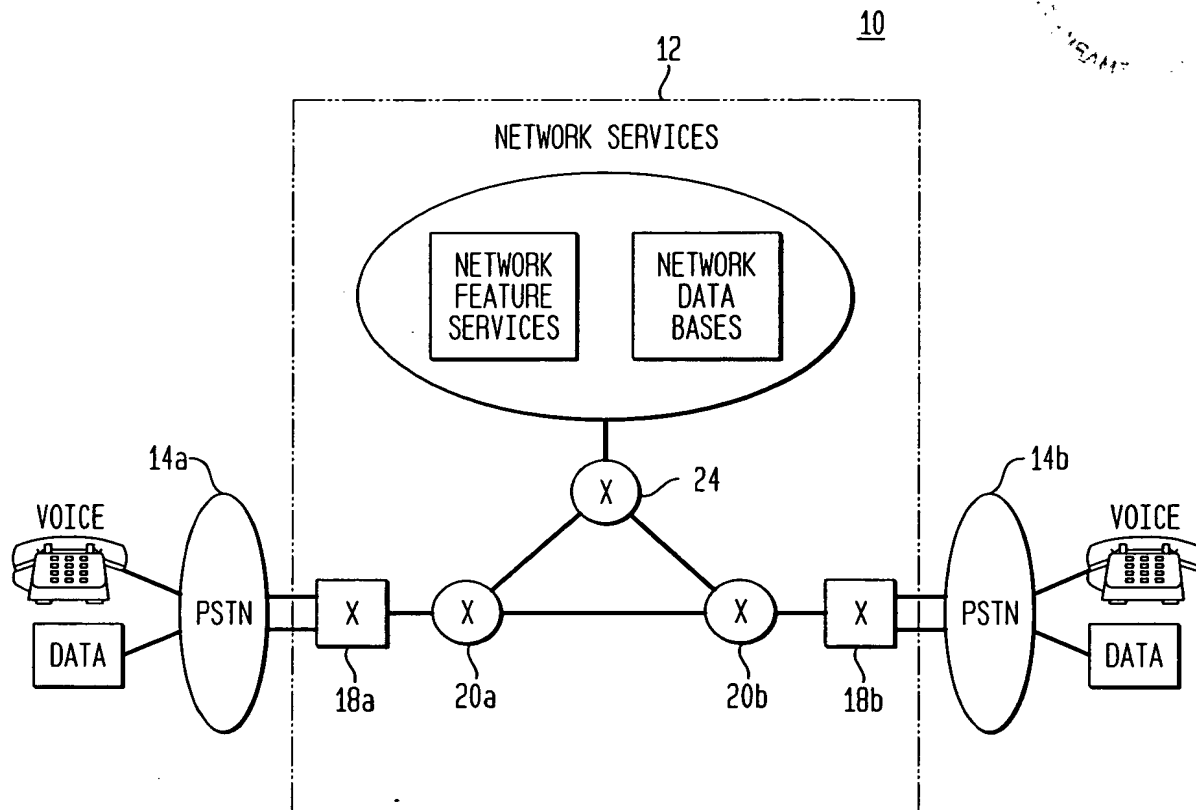


FIG. 2

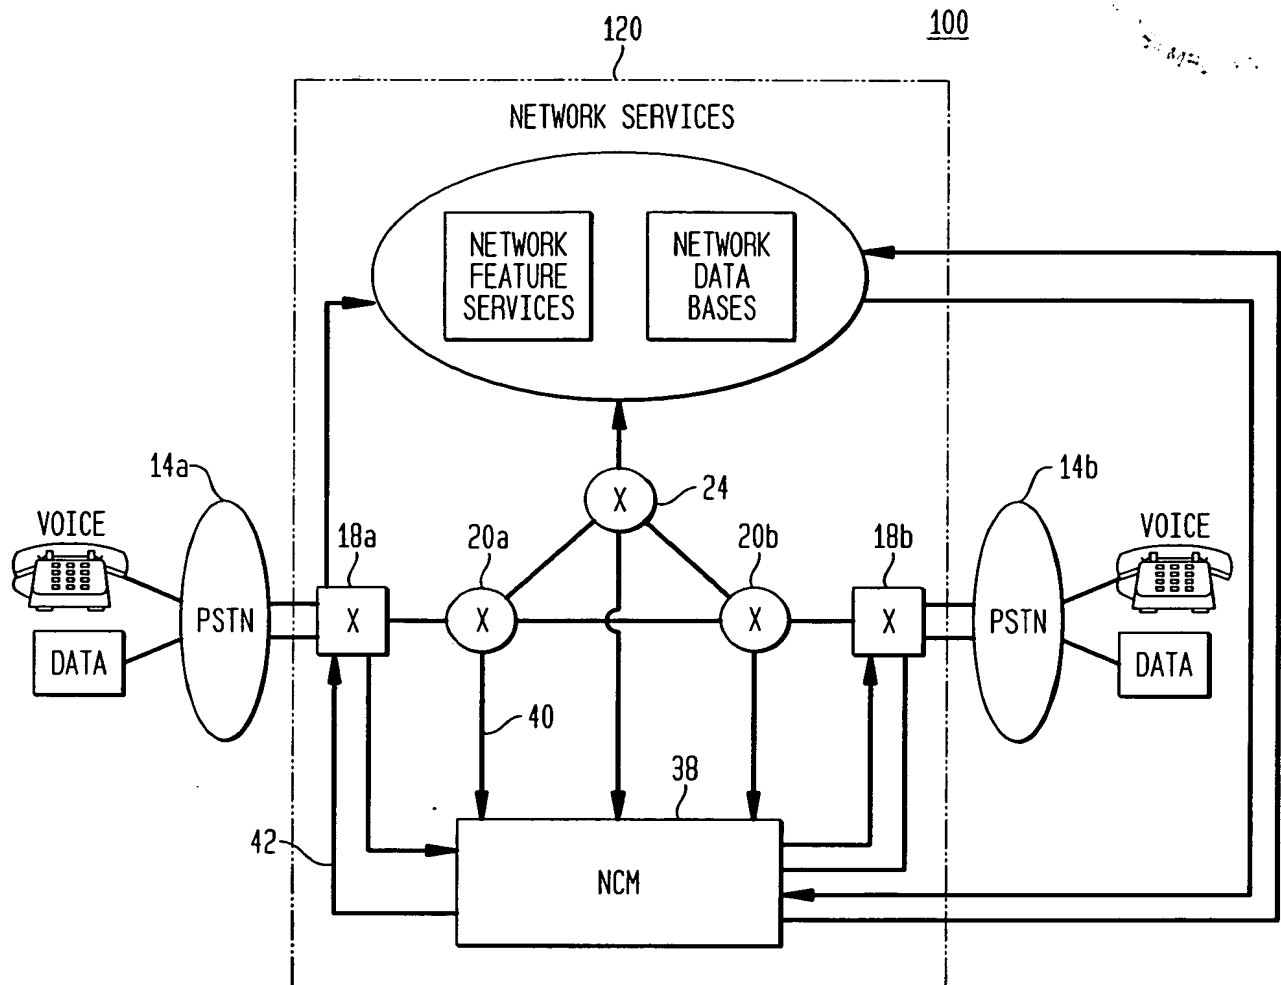


FIG. 3A



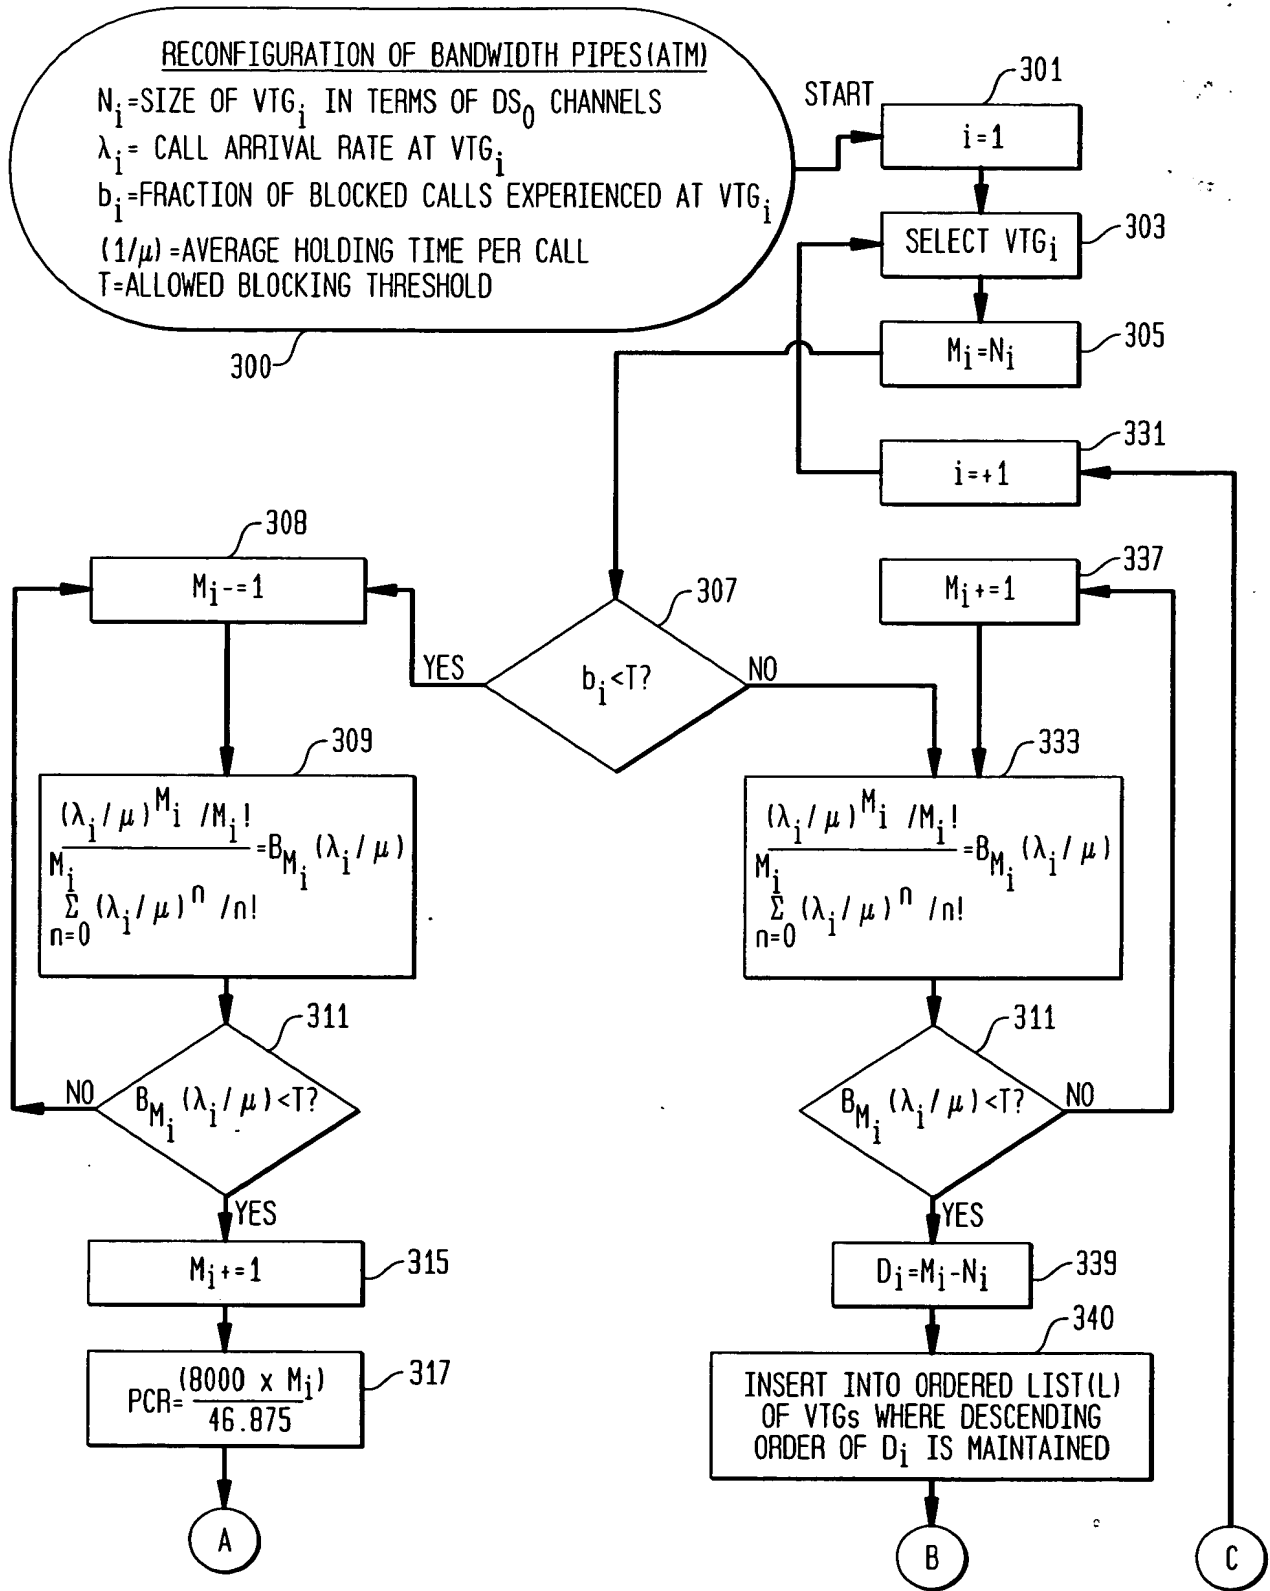


FIG. 3B

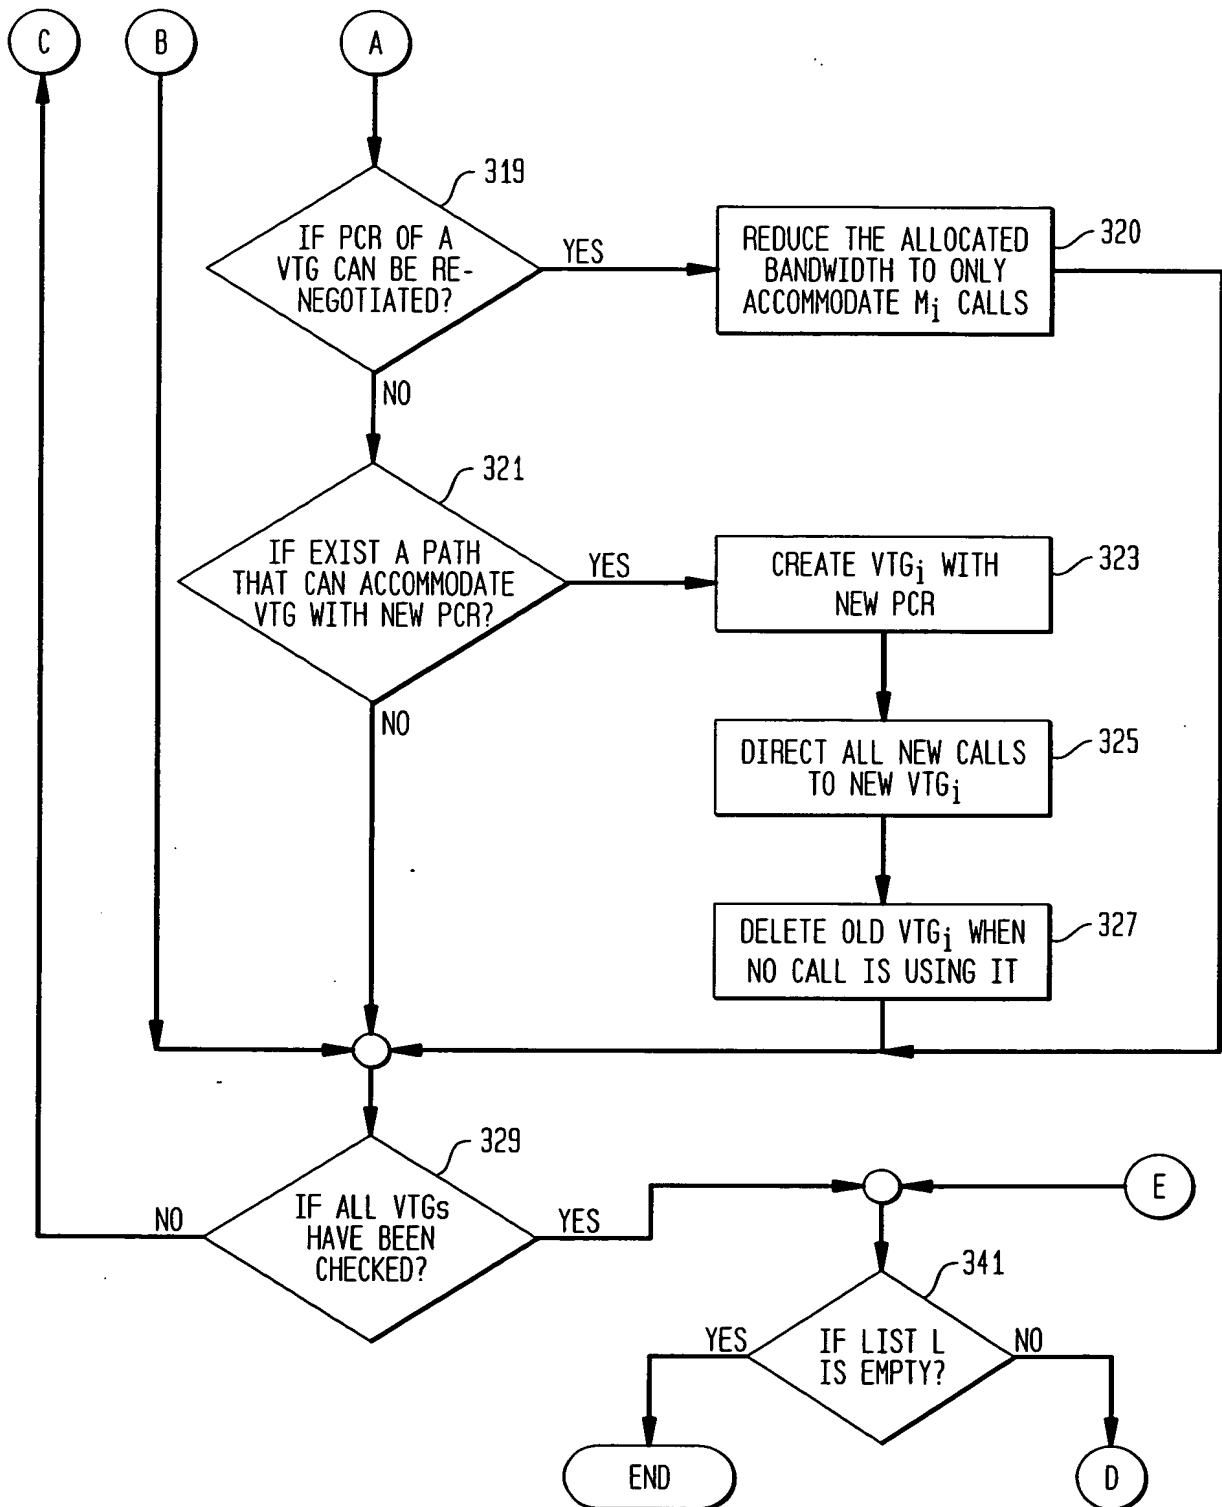


5/23

FIG. 3C

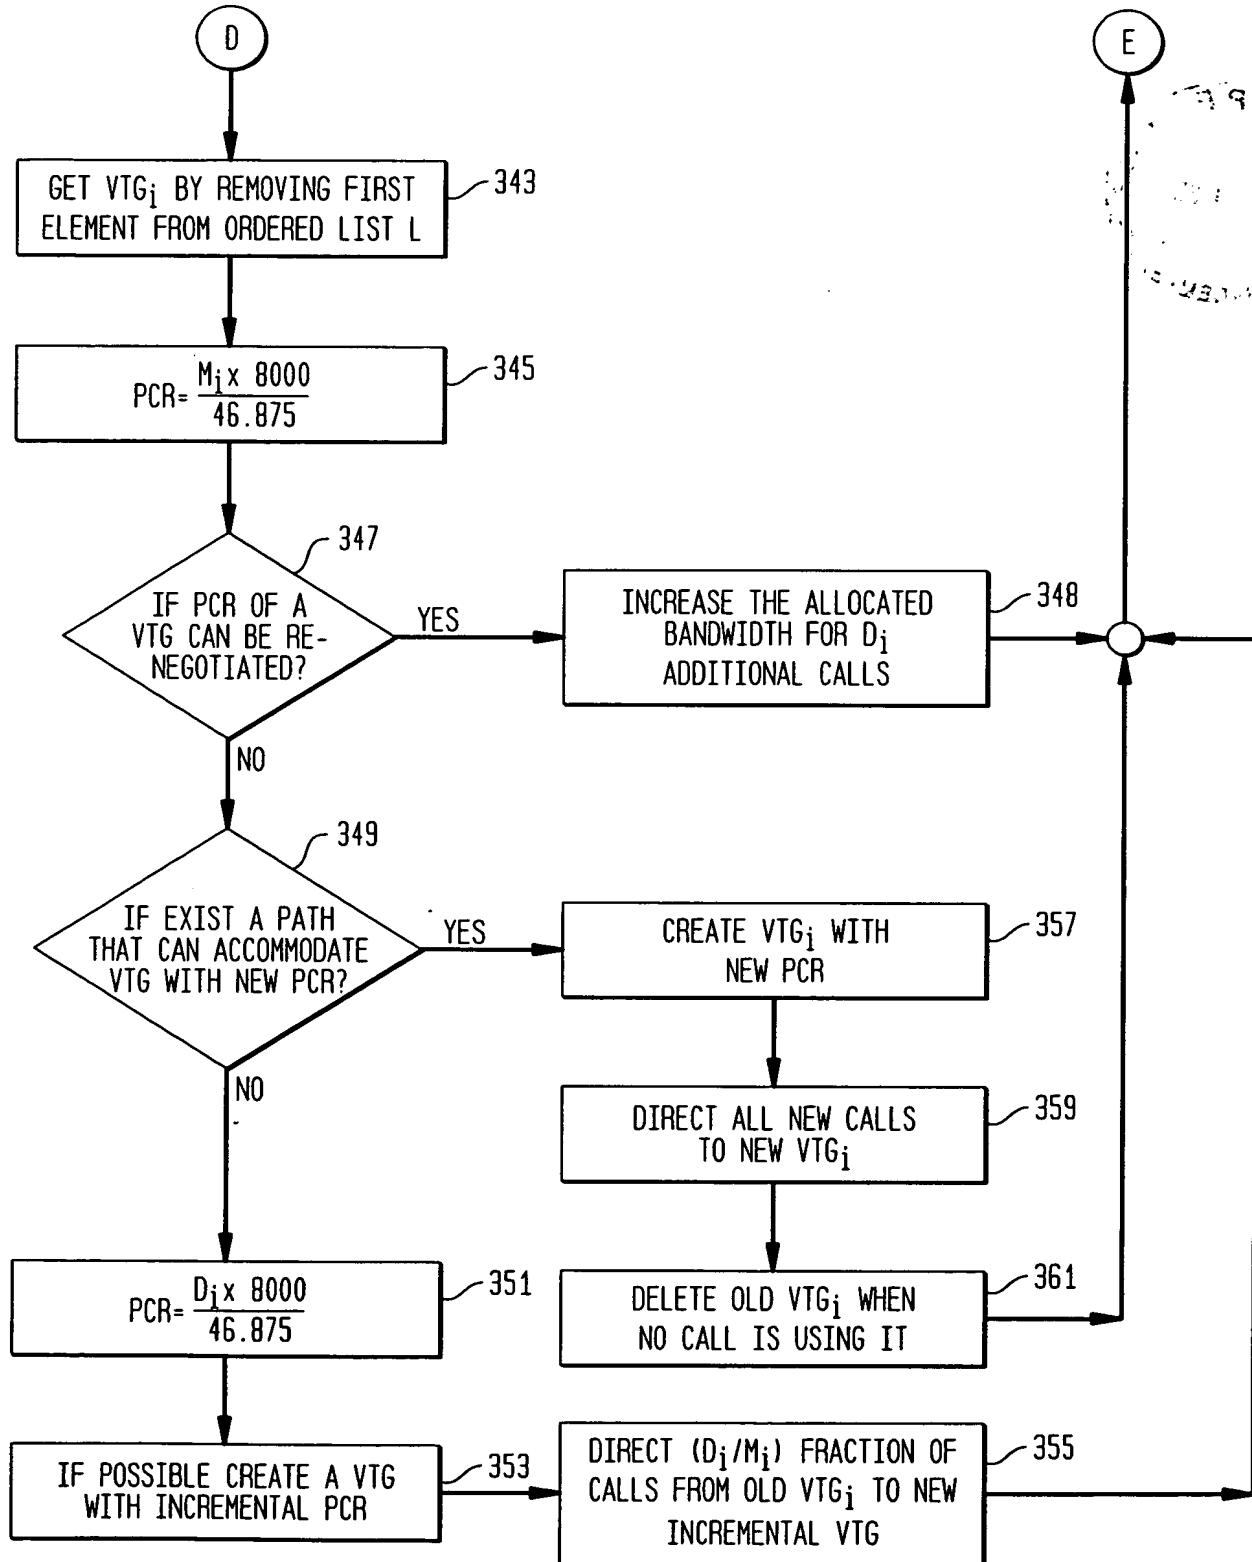

6/23

FIG. 4A

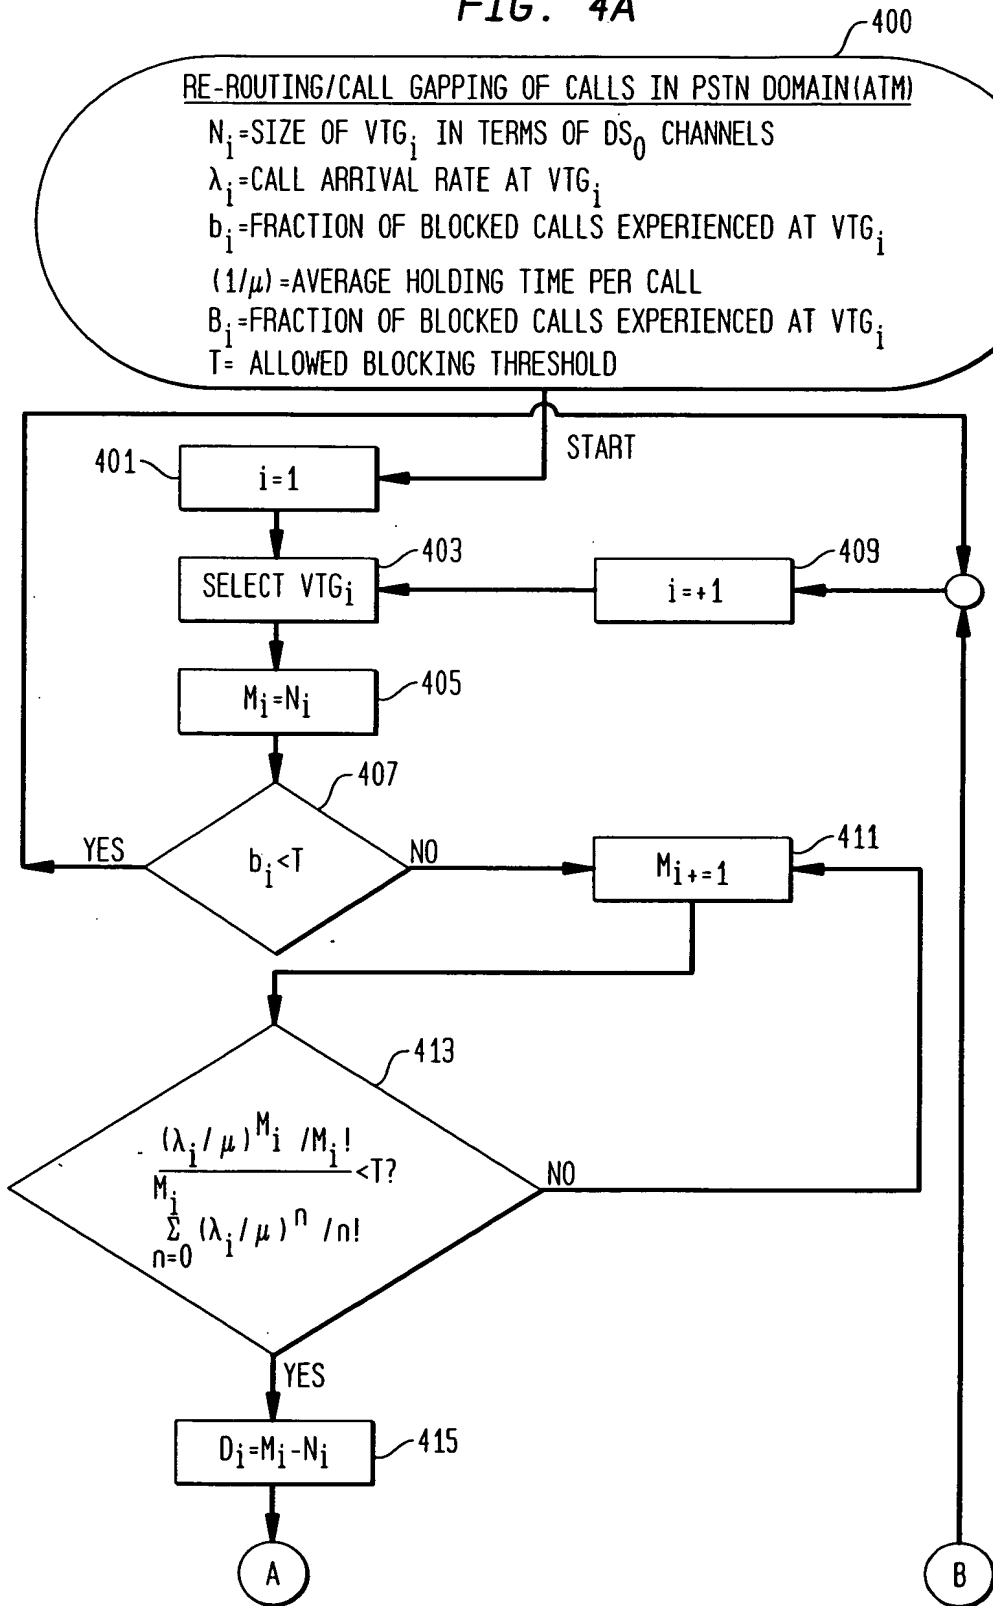

7/23

FIG. 4B



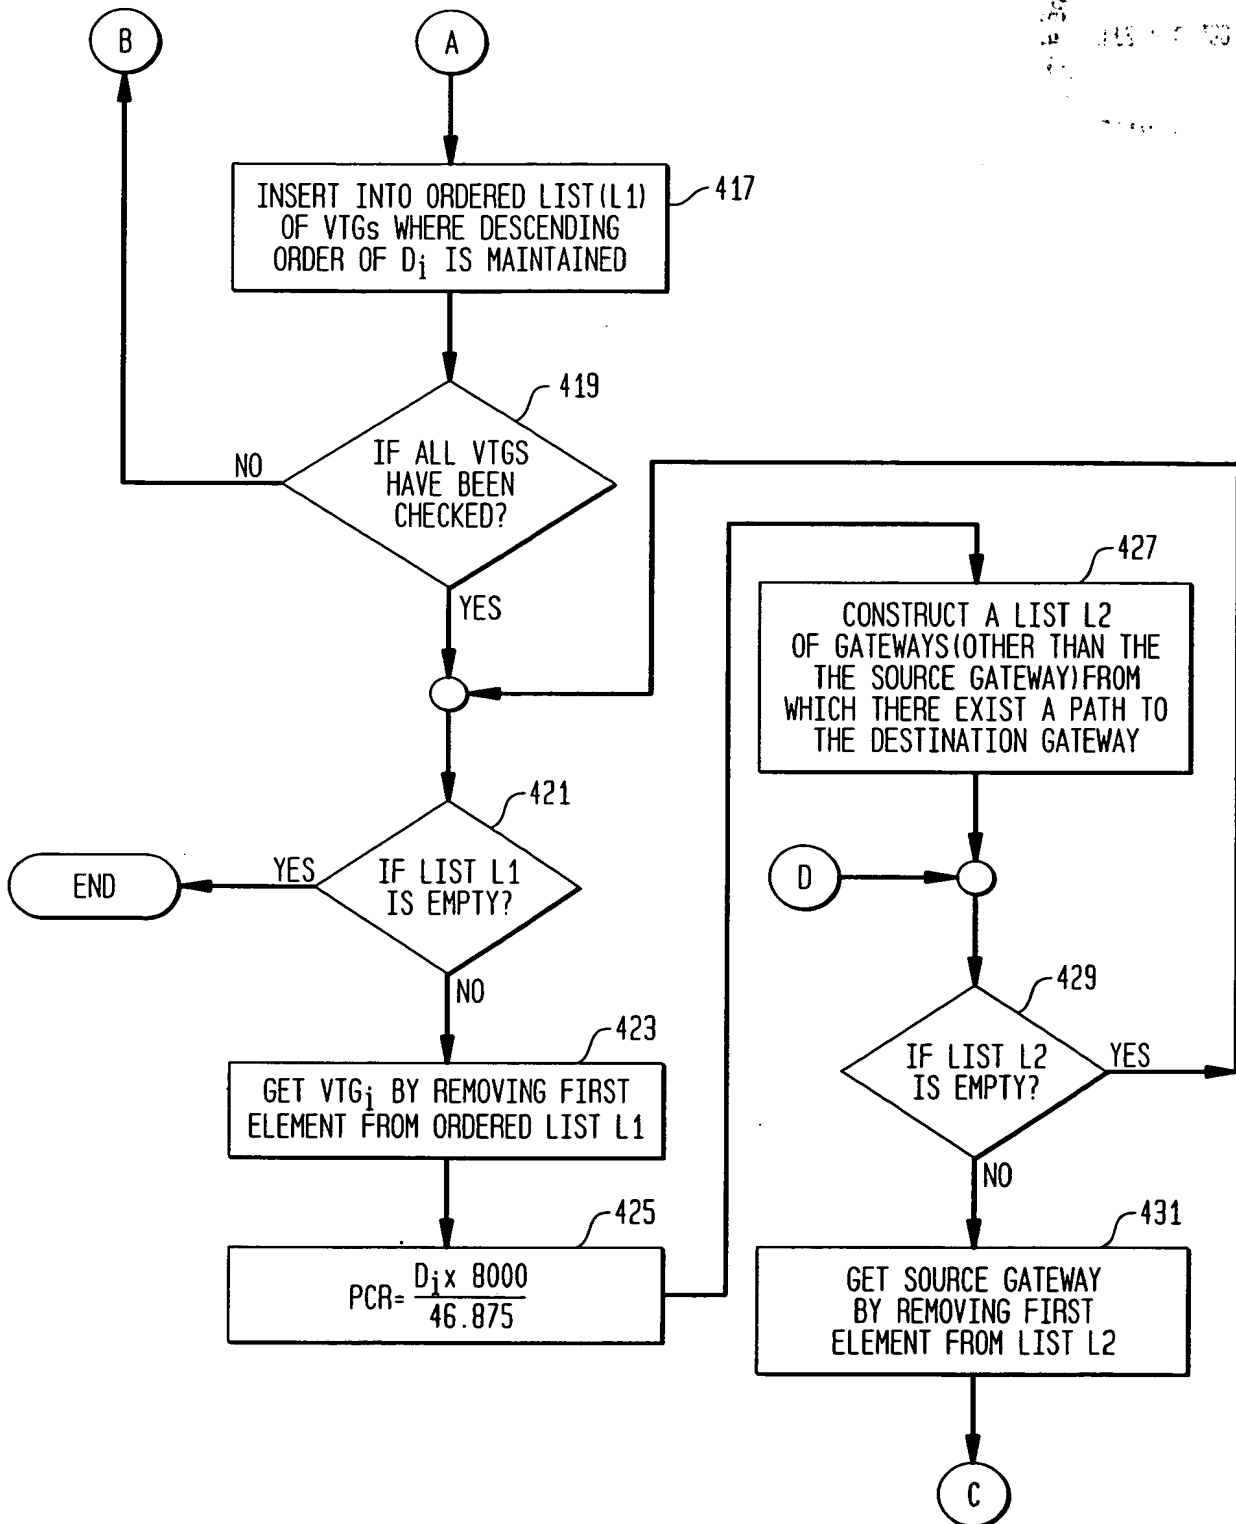


FIG. 4C

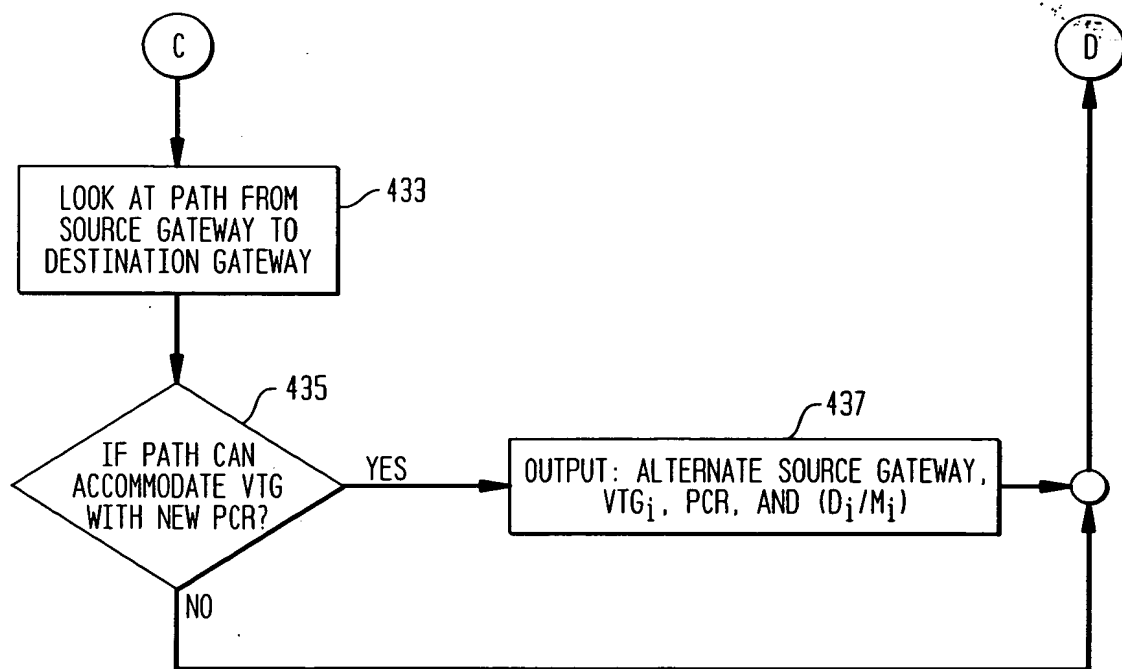


9/23

FIG. 5A

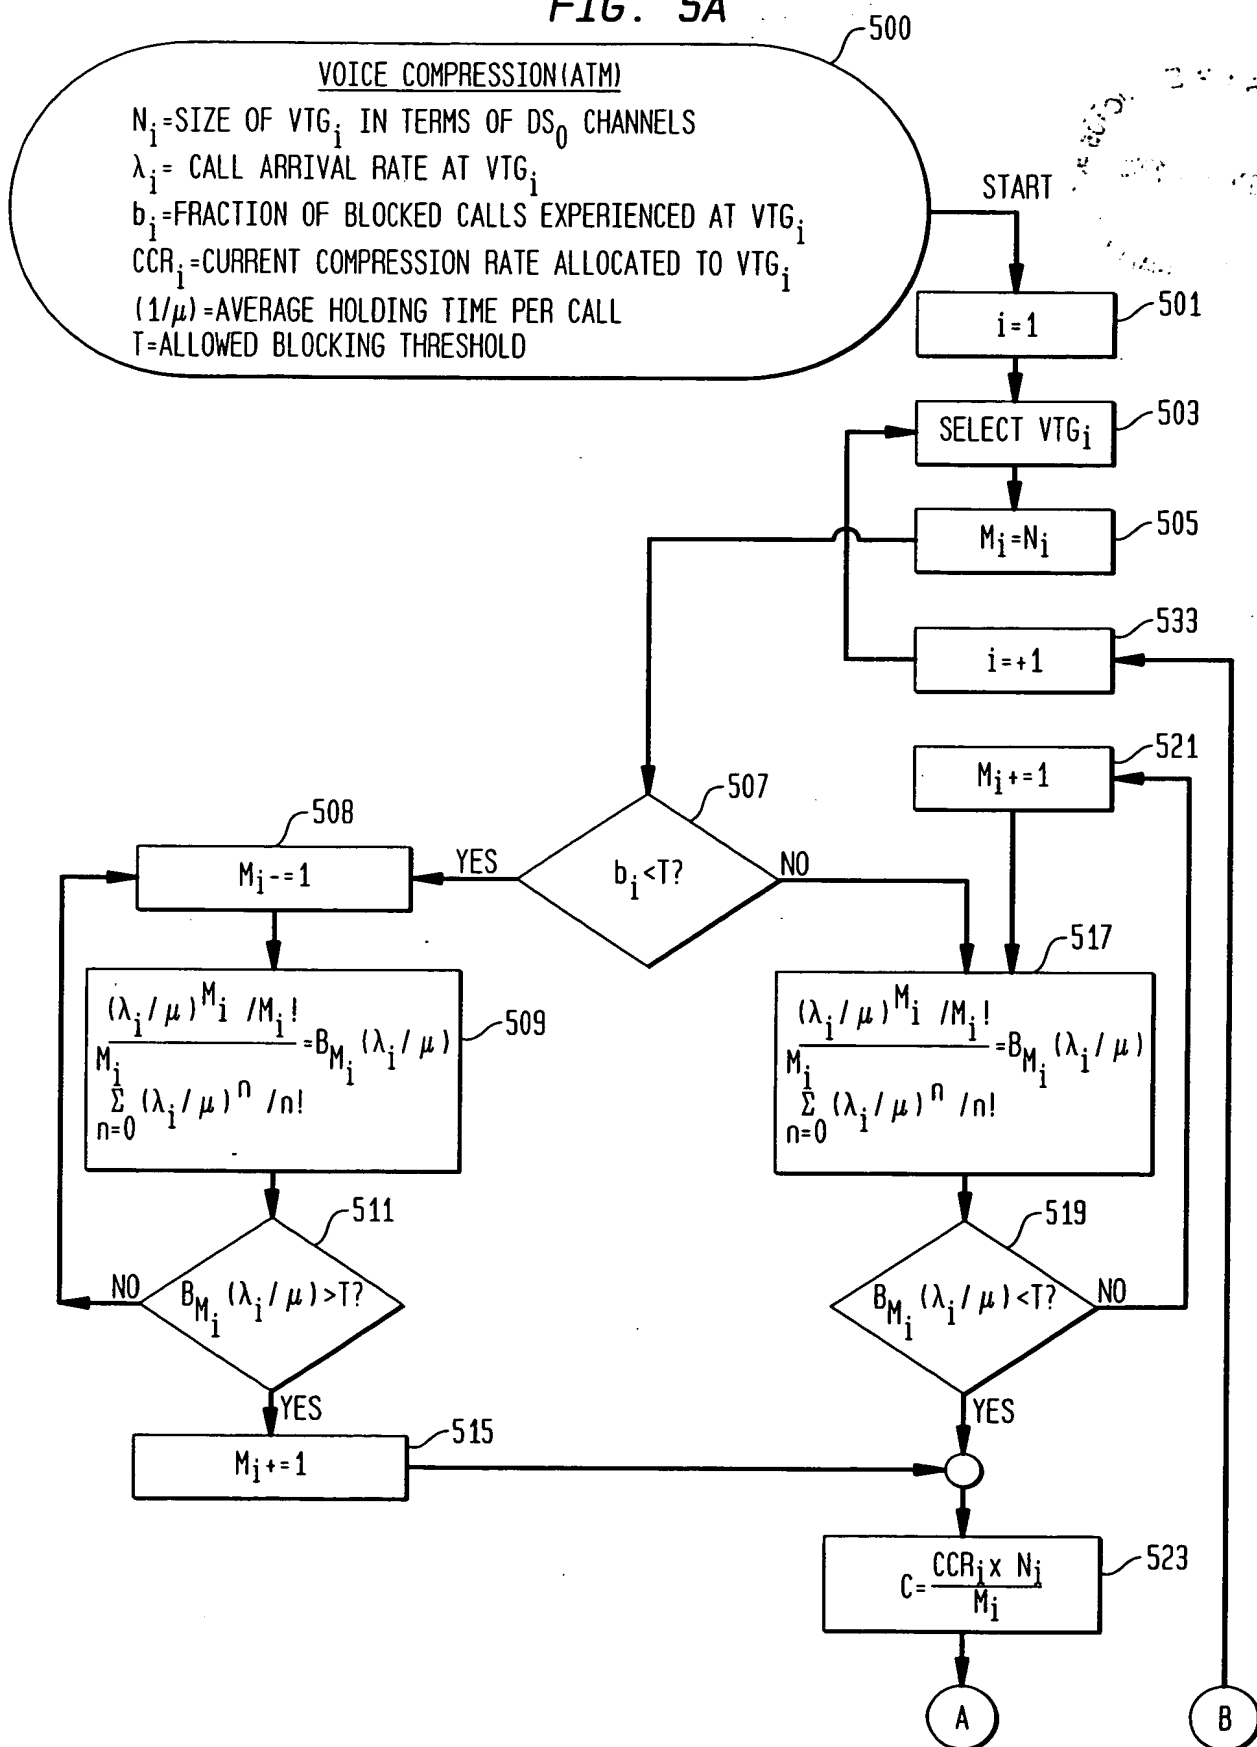


10/23

FIG. 5B

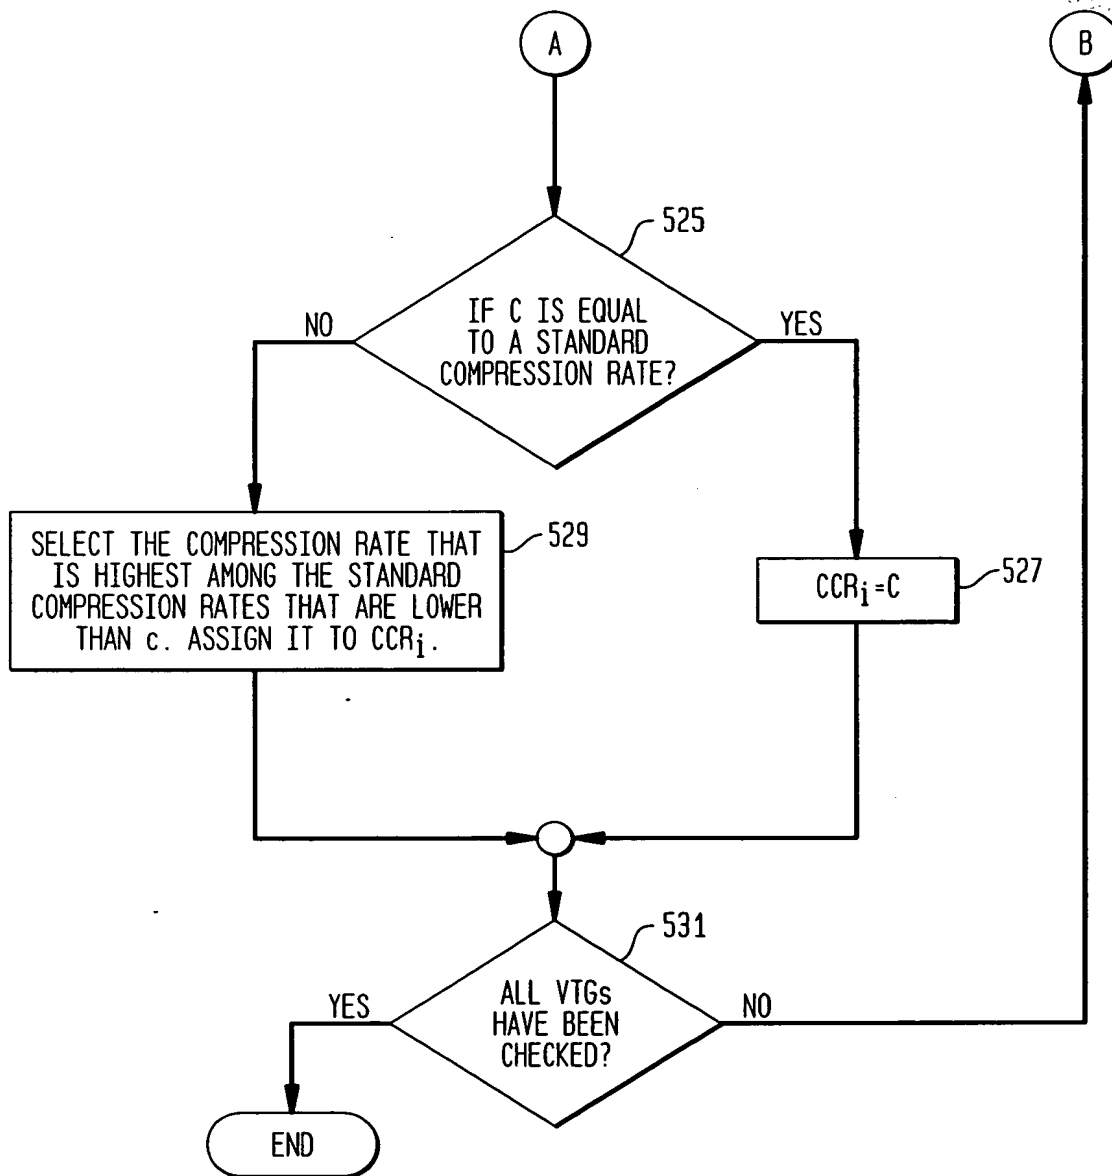

11/23

FIG. 6A

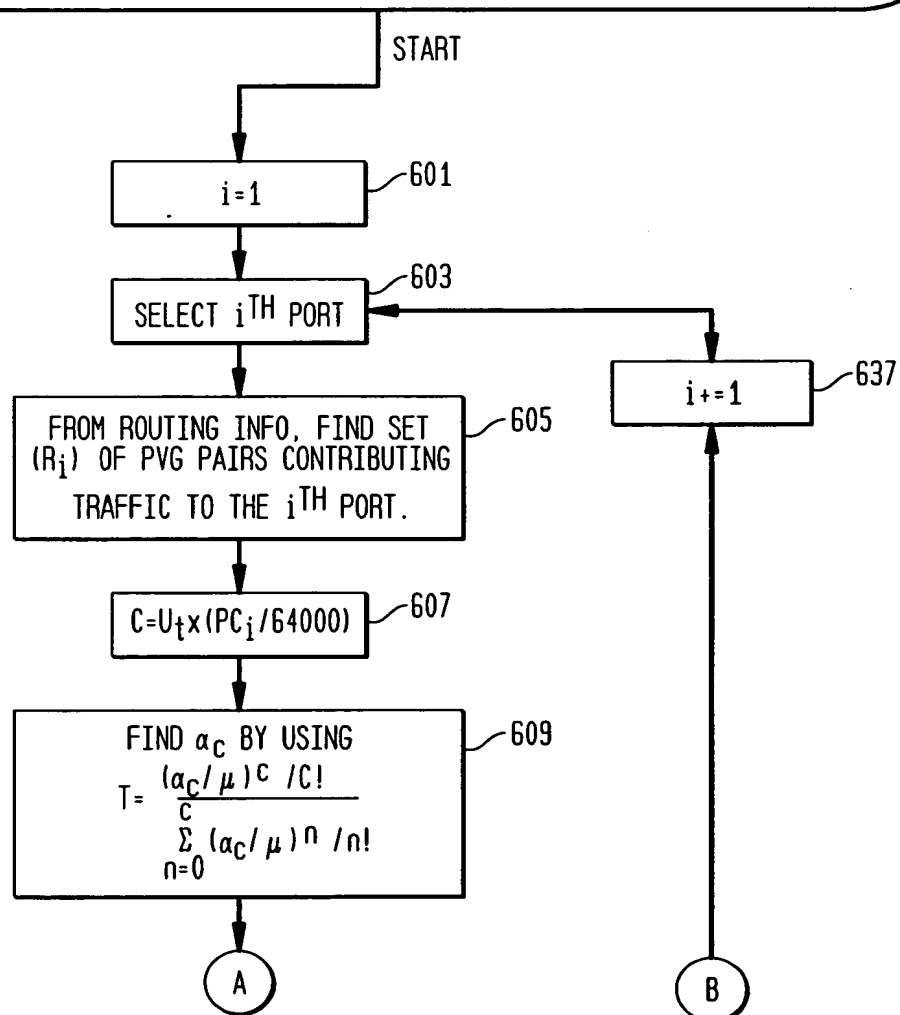CALL BLOCKING (UNAVAILABILITY OF RTP MEASUREMENTS) PU_i = UTILIZATION OF i^{th} PORT PC_i = CAPACITY OF i^{th} PORT U_t = UTILIZATION THRESHOLD λ_k = CALL ARRIVAL RATE FOR k^{th} PVG PAIR N_k = NUMBER OF CALLS FOR WHICH BANDWIDTH IS ALLOCATED TO k^{th} PVG PAIR ρ_{B_i} = BANDWIDTH REDUCTION CORRECTION FACTOR DUE TO THE i^{th} PORT ρ_{G_i} = BANDWIDTH INCREMENTAL CORRECTION FACTOR DUE TO THE i^{th} PORT f_k = BANDWIDTH REDUCTION CORRECTION FACTOR ASSIGNED TO THE k^{th} PVG PAIR e_k = BANDWIDTH INCREMENTAL CORRECTION FACTOR ASSIGNED TO THE k^{th} PVG PAIR B_k = ASSIGNED BLOCKING PROBABILITY TO THE k^{th} PVG PAIR $(1/\mu)$ = AVERAGE CALL HOLDING TIME T = BLOCKING THRESHOLD

12/23

FIG. 6B


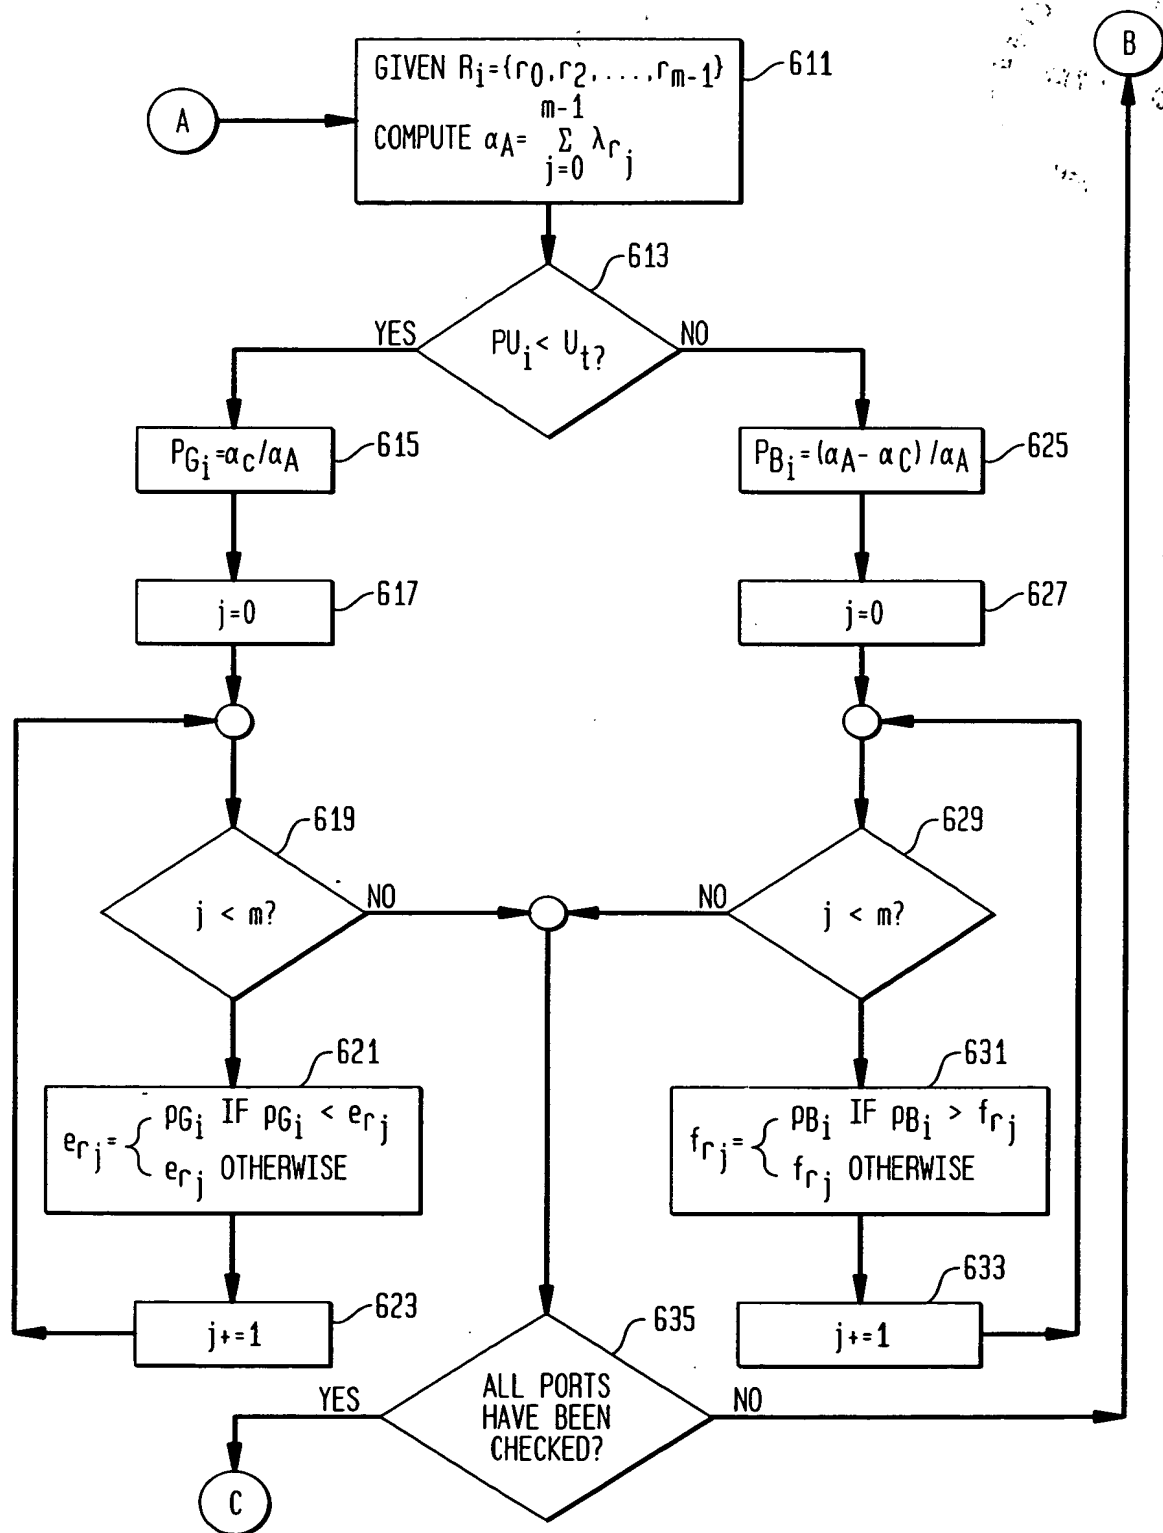


FIG. 6C

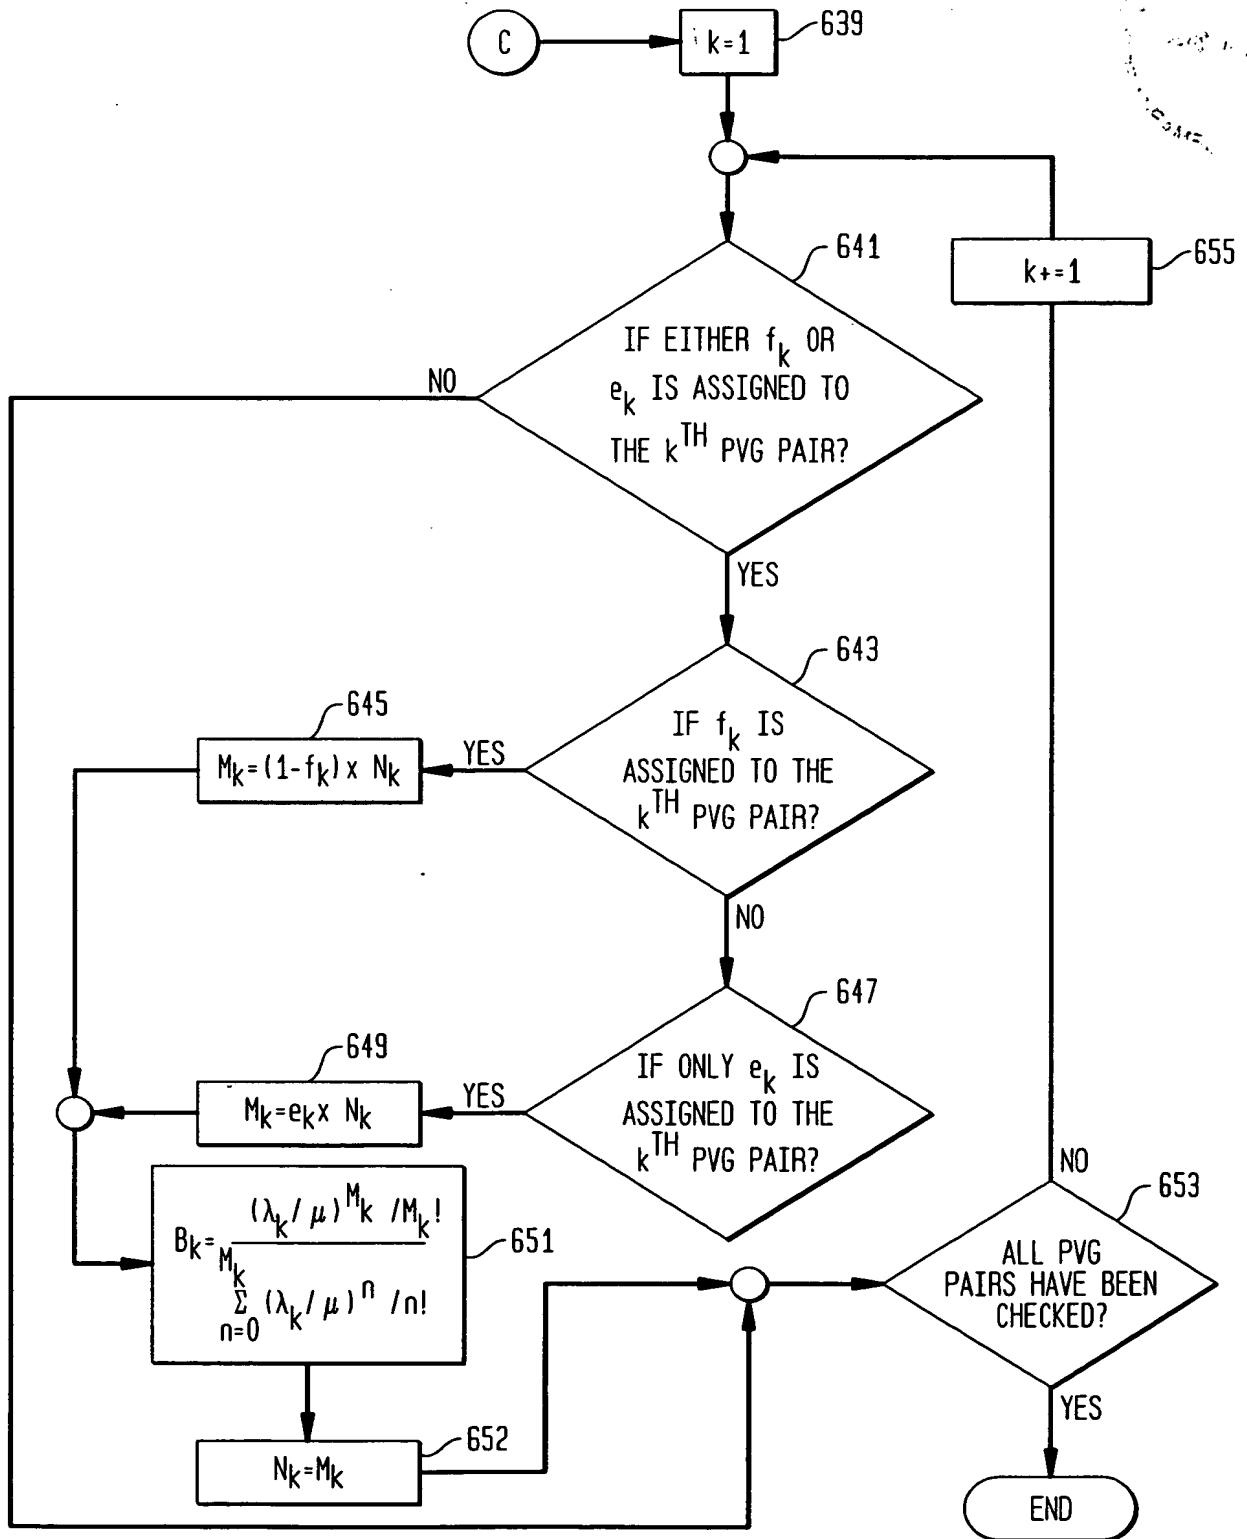

14/23

FIG. 7A

700


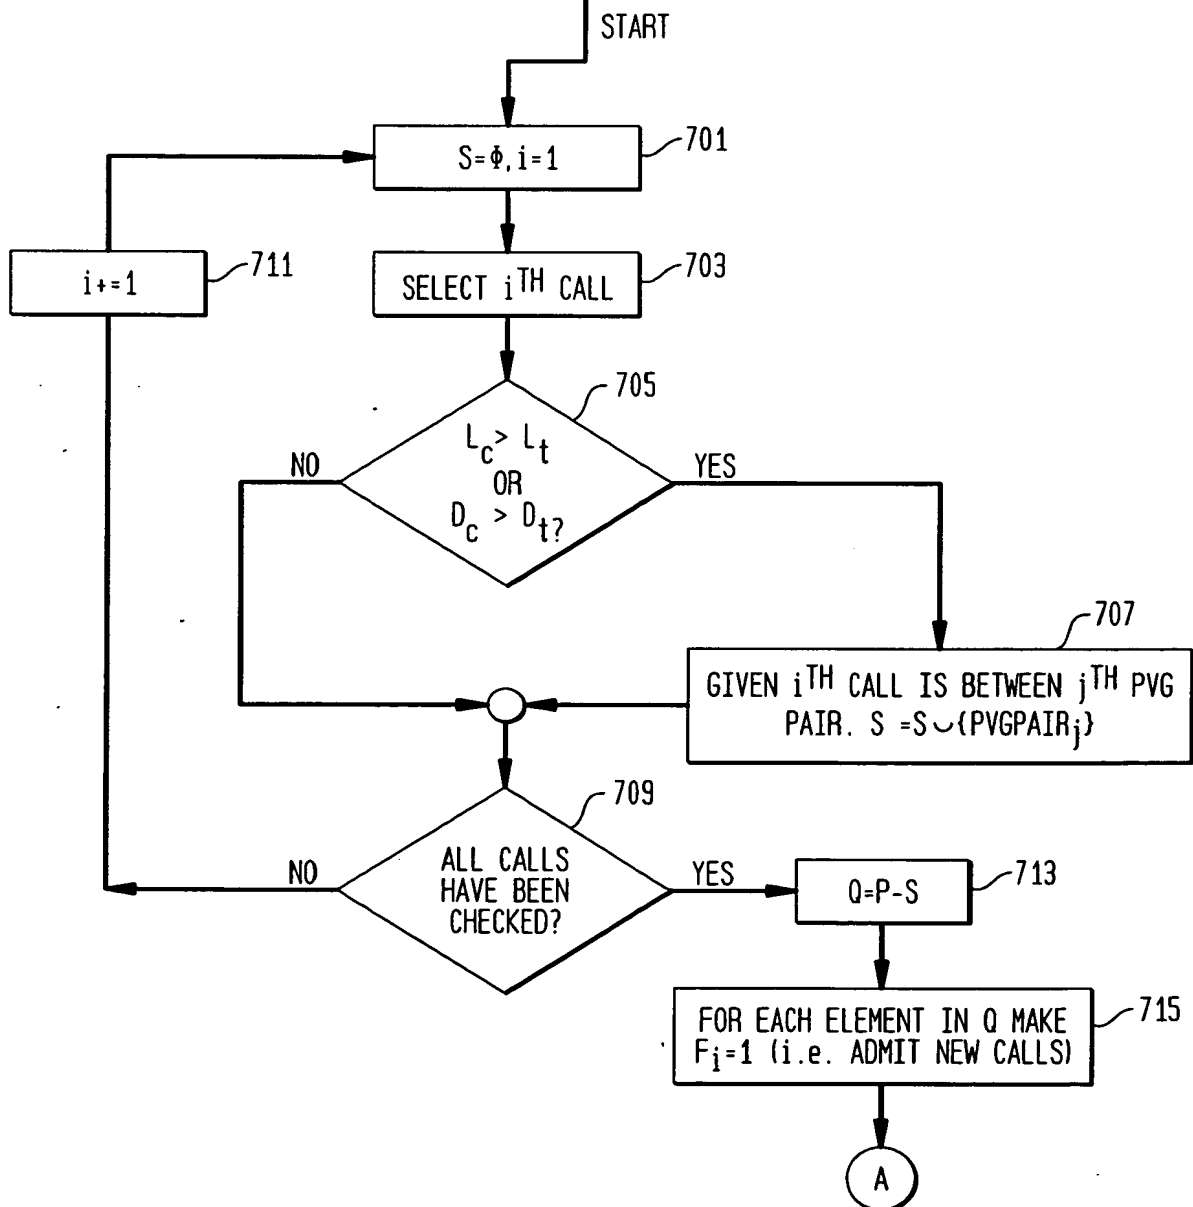
CALL BLOCKING(AVAILABILITY OF RTP MEASUREMENTS) L_c = FRACTION OF PACKET LOSS PER CALL L_t = PACKET LOSS THRESHOLD D_c = DELAY JITTER PER CALL D_t = DELAY JITTER THRESHOLD N_i = NUMBER OF ACTIVE CALLS IN i^{th} PVG PAIR $PVGPAIR_i = i^{\text{th}}$ PVG PAIR S = SET OF PVG PAIRS BETWEEN WHICH POOR PERFORMING CALLS EXIST P = SET OF ALL PVG PAIRS F_i = INDICATOR FLAG FOR $PVGPAIR_i$ 

FIG. 7B

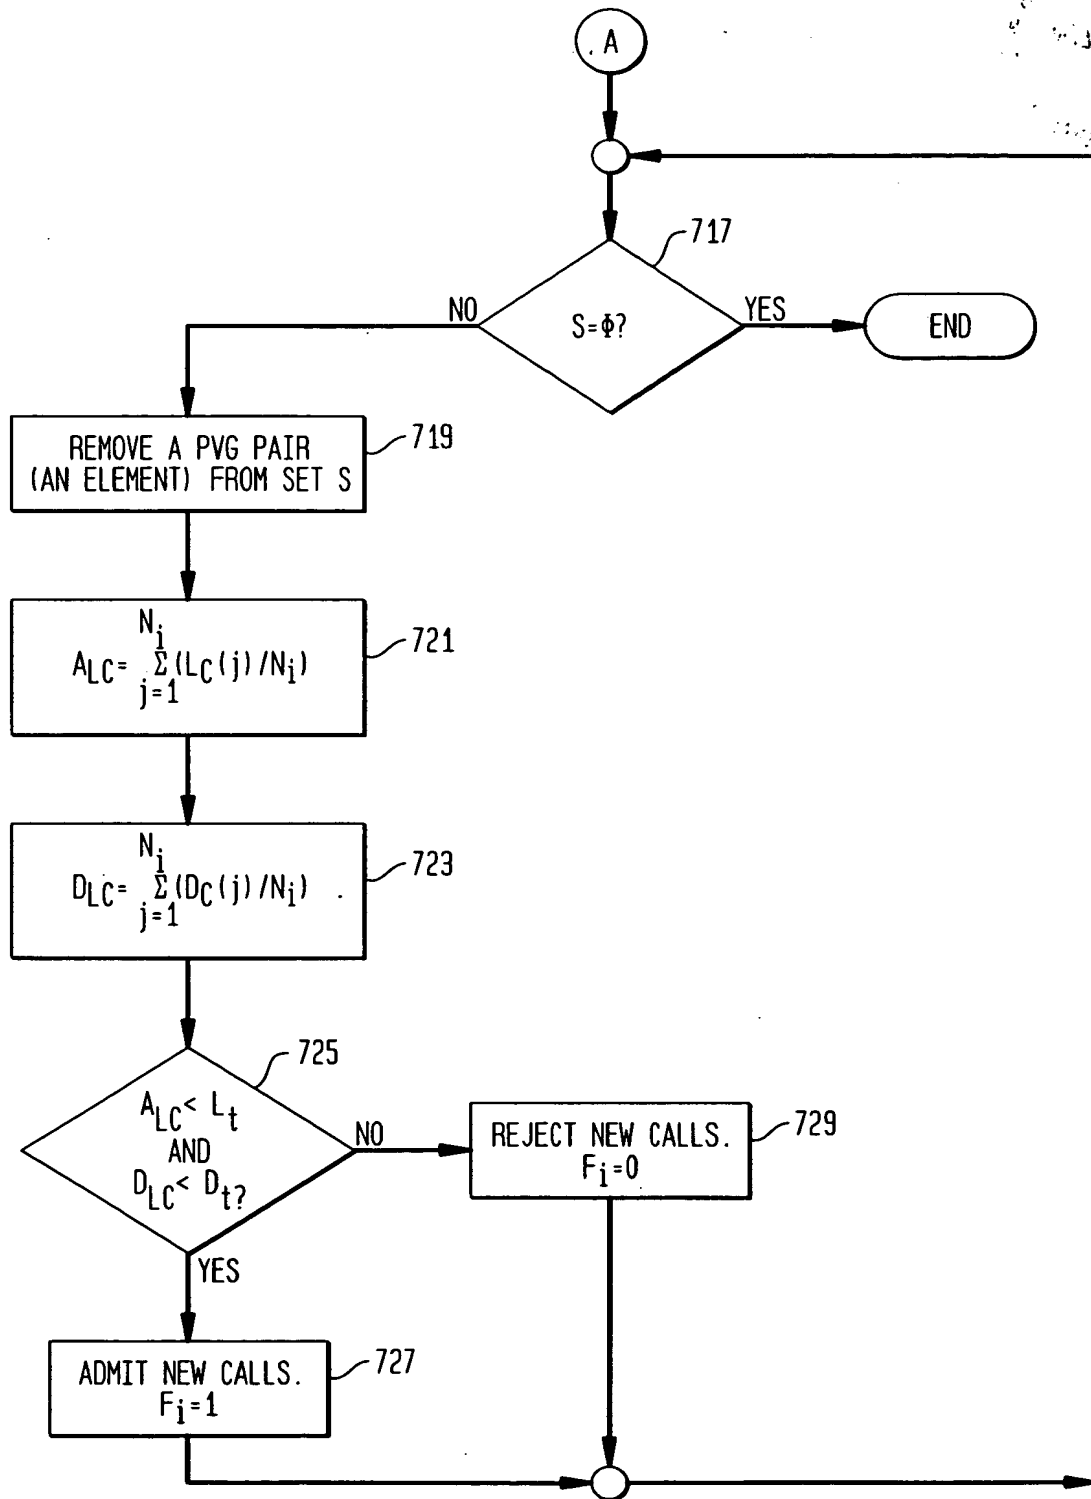


16/23

FIG. 8A


800

RE-ROUTING/CALL GAPPING(AVAILABILITY/UNAVAILABILITY OR RTP MEASUREMENTS)

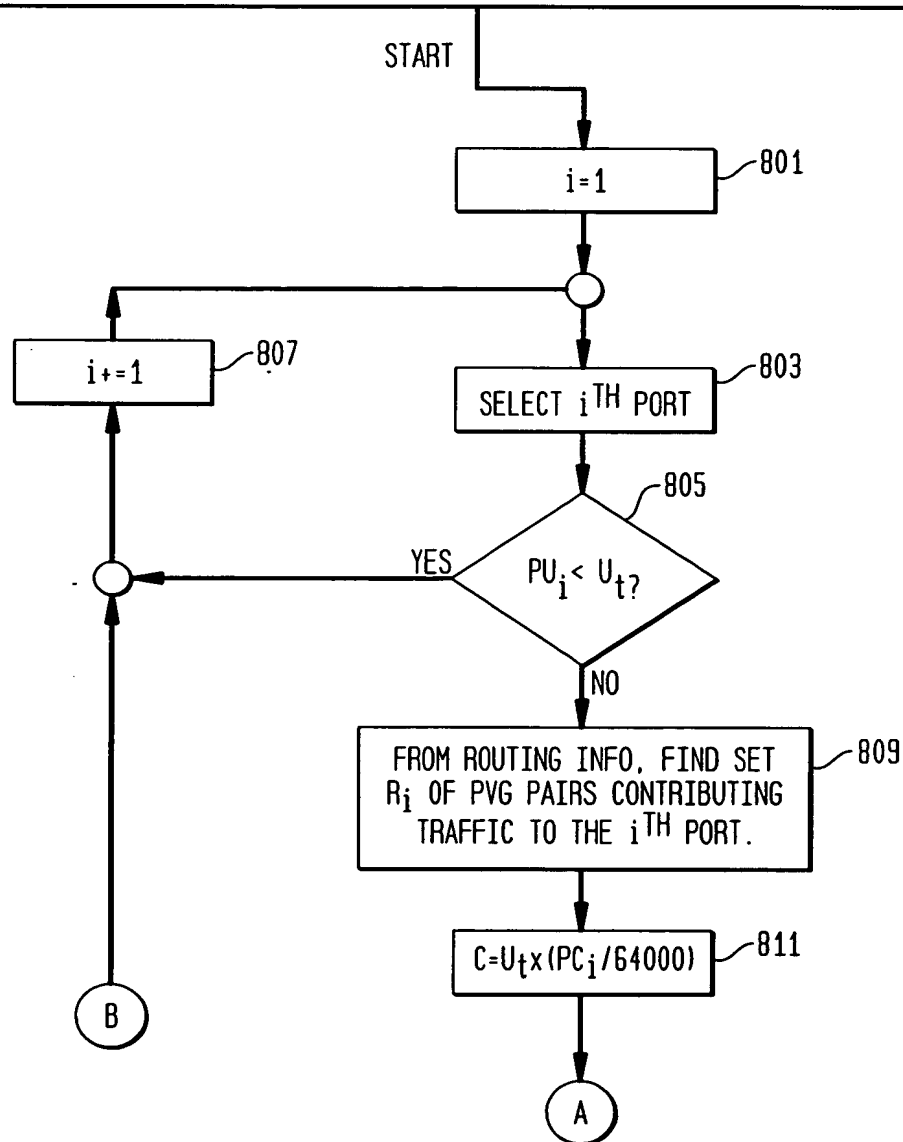 PU_i = UTILIZATION OF i^{th} PORT PC_i = CAPACITY OF i^{th} PORT U_t = UTILIZATION THRESHOLD λ_k = CALL ARRIVAL RATE FOR k^{th} PVG PAIR N_k = NUMBER OF CALLS FOR WHICH BANDWIDTH IS ALLOCATED TO k^{th} PVG PAIR $(1/\mu)$ = AVERAGE CALL HOLDING TIME p_{B_i} = BANDWIDTH CORRECTION FACTOR DUE TO i^{th} PORT f_k = BANDWIDTH CORRECTION FACTOR ASSIGNED TO THE k^{th} PVG PAIR T = BLOCKING THRESHOLD

17/23

FIG. 8B

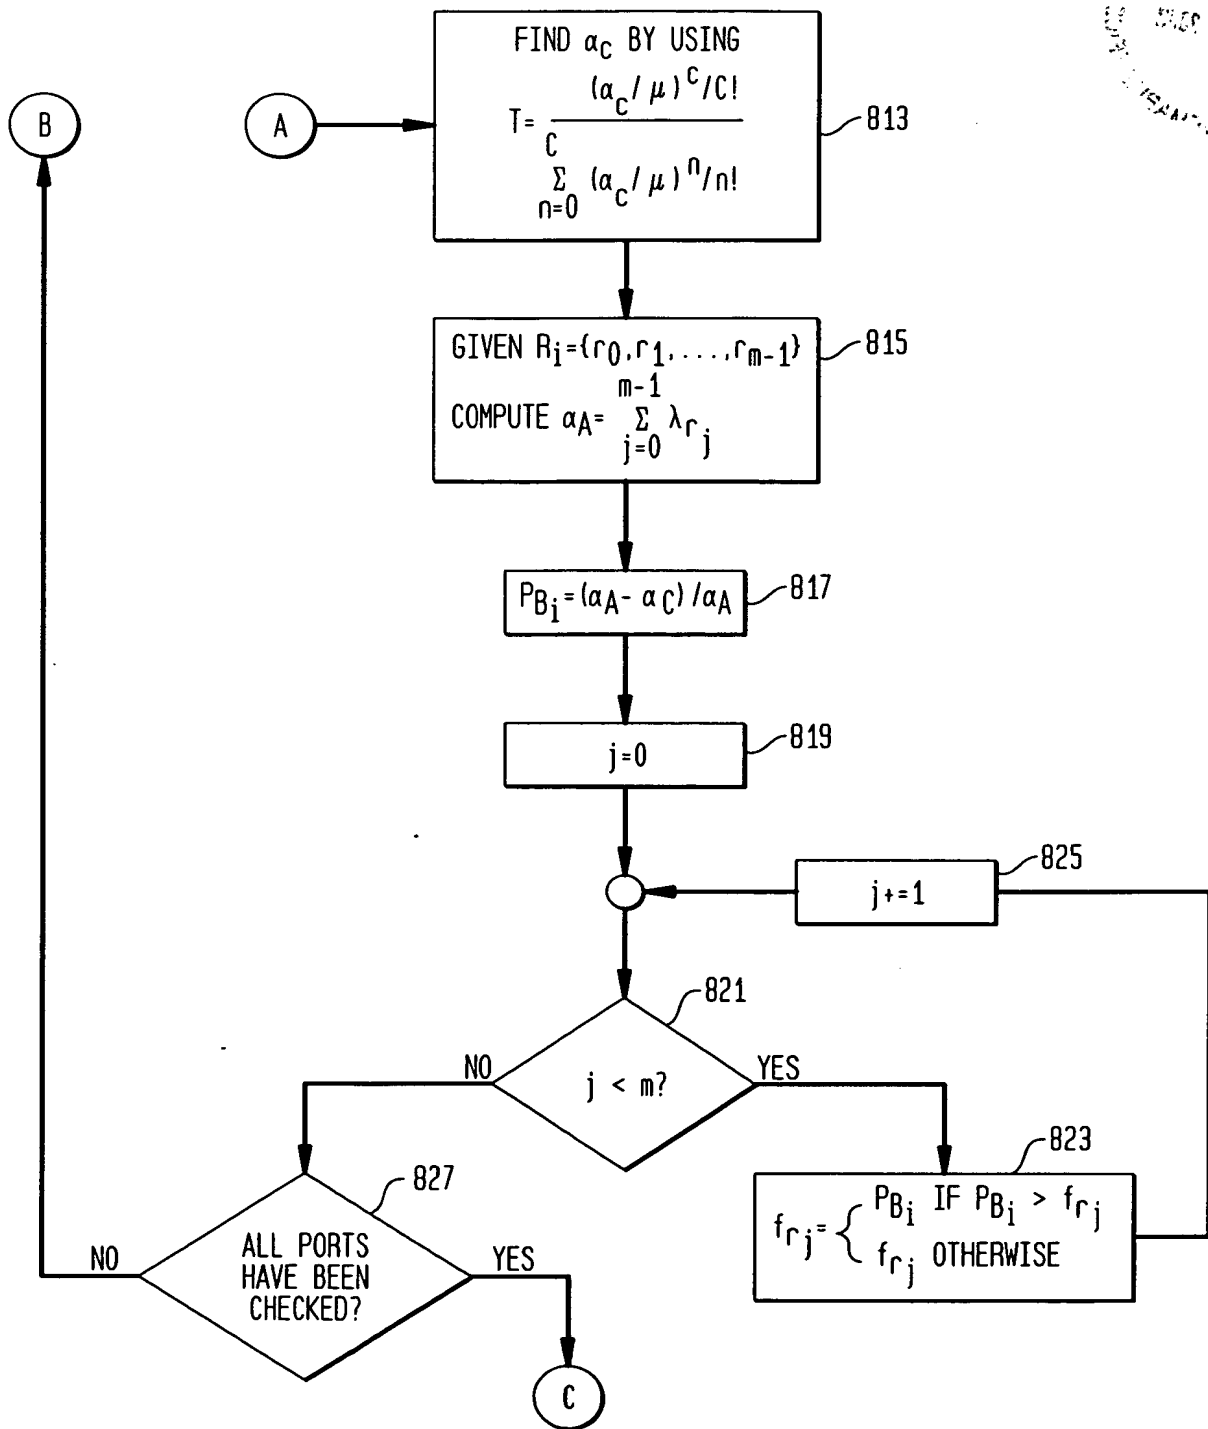

18/23

FIG. 8C


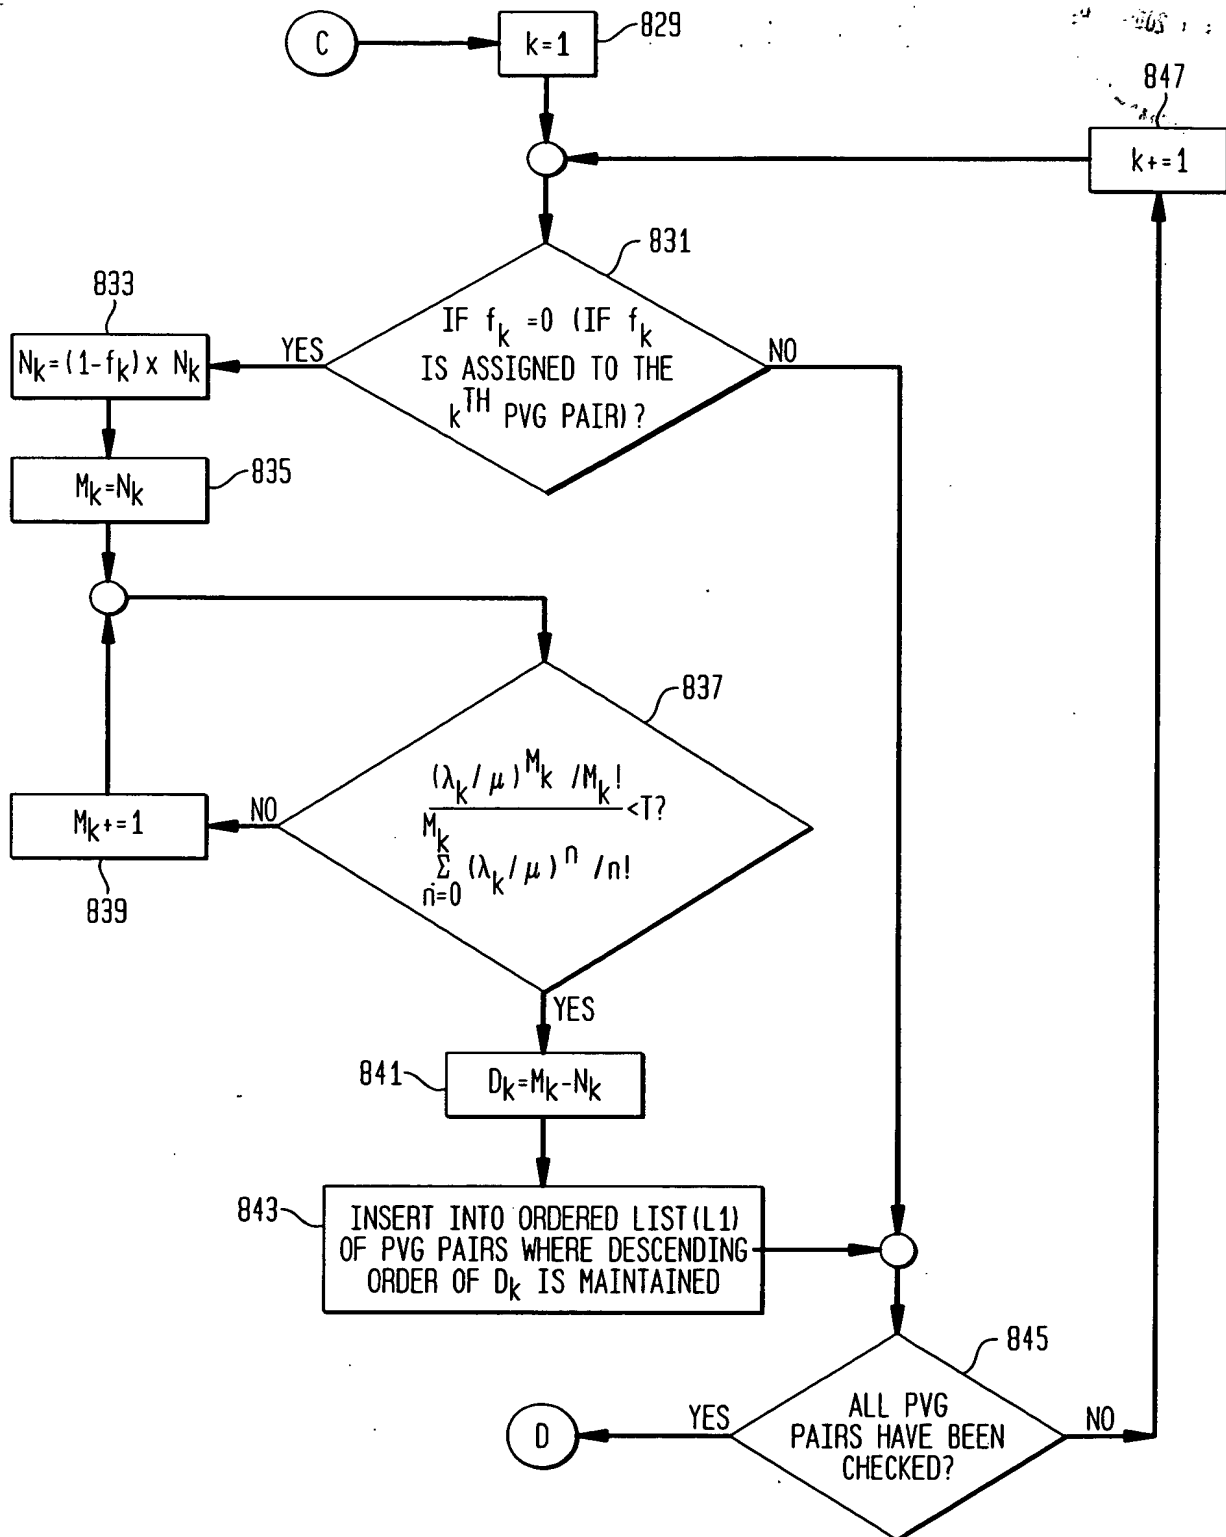



FIG. 8D

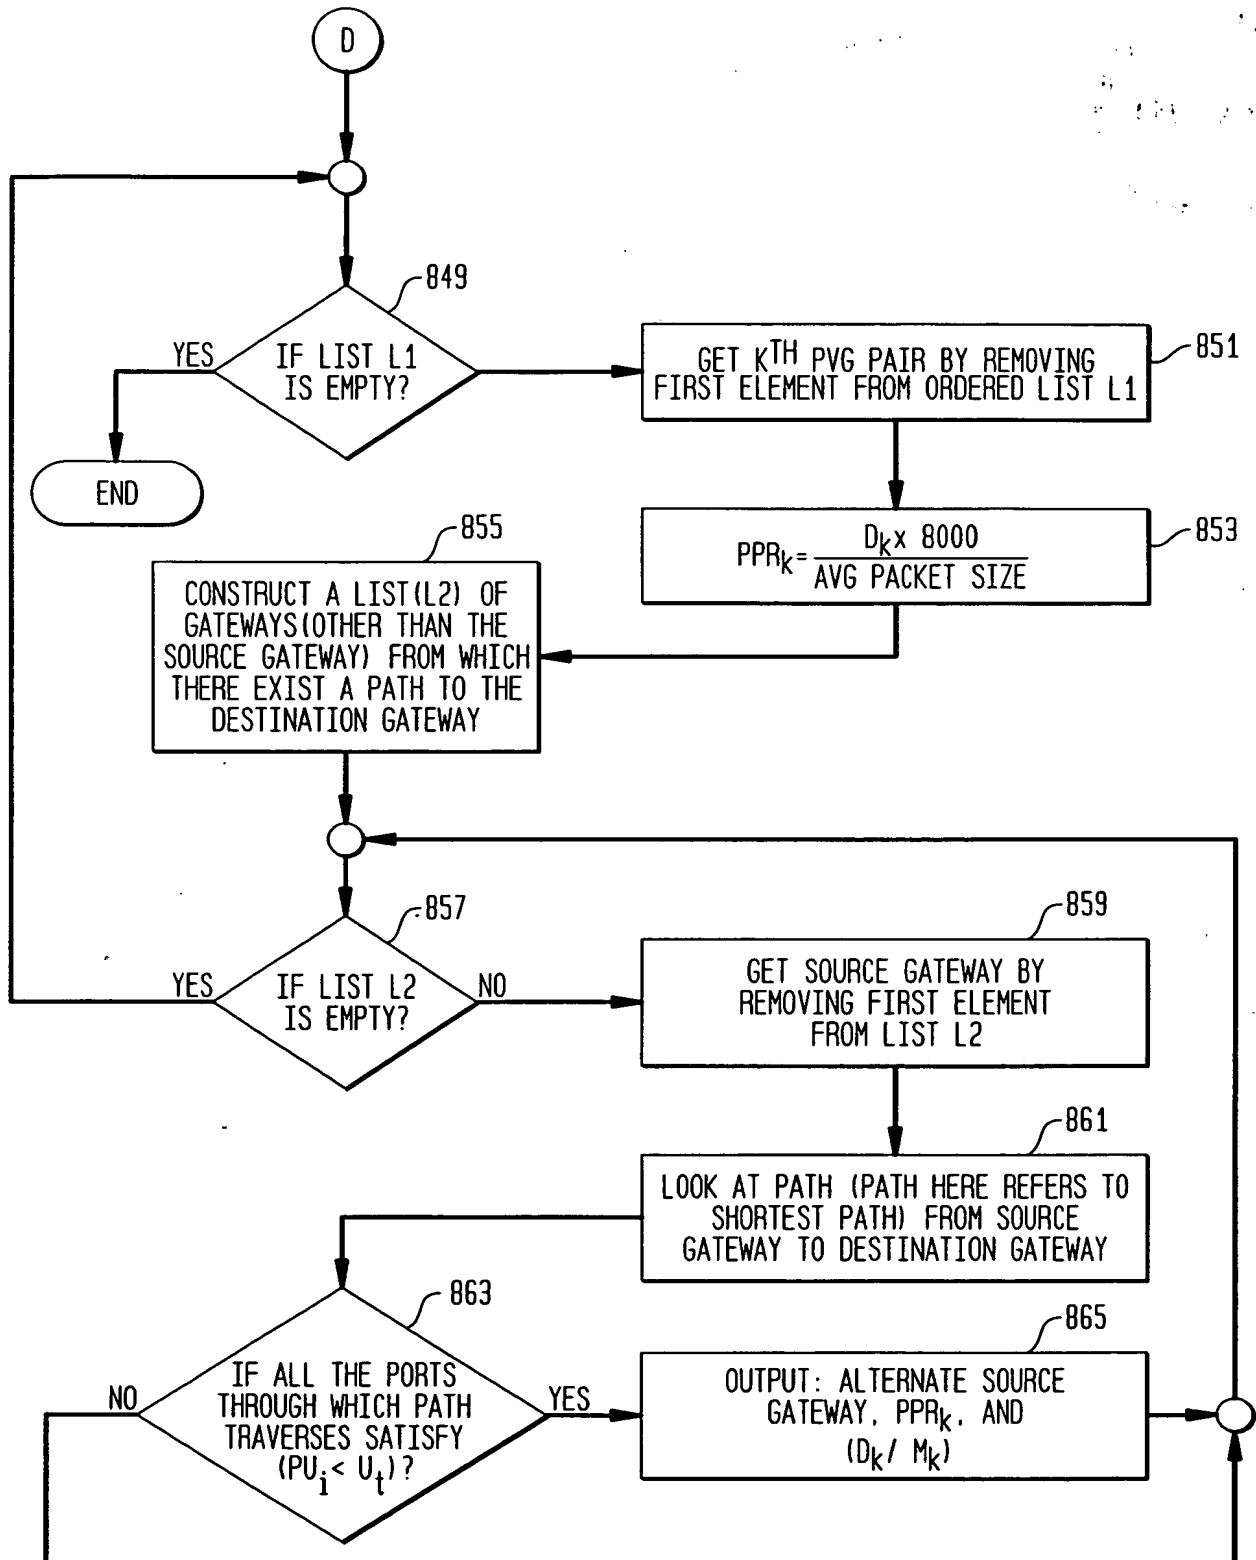

20/23


FIG. 9A

900

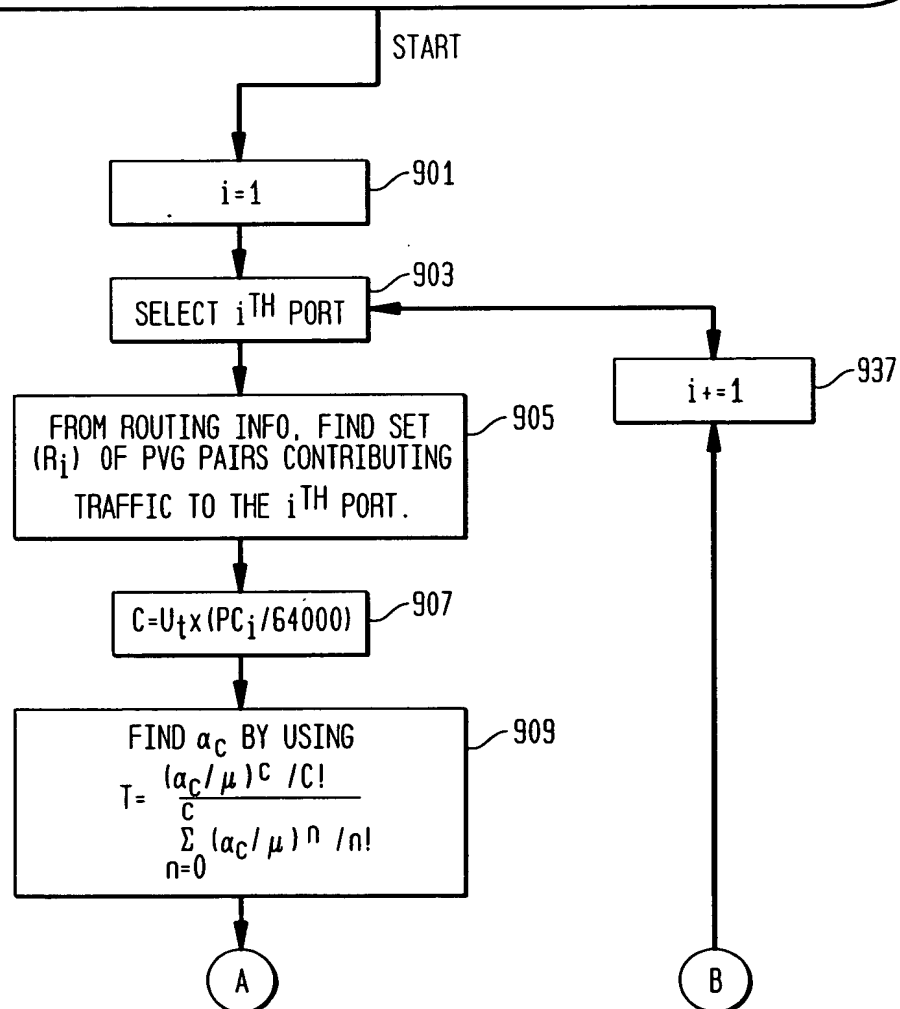COMPRESSION (AVAILABILITY/UNAVAILABILITY OF RTP MEASUREMENTS) U_i = UTILIZATION OF i^{th} PORT PC_i = CAPACITY OF i^{th} PORT U_t = UTILIZATION THRESHOLD λ_k = CALL ARRIVAL RATE FOR k^{th} PVG PAIR N_k = NUMBER OF CALLS FOR WHICH BANDWIDTH IS ALLOCATED TO k^{th} PVG PAIR CCR_k = CURRENT COMPRESSION RATE ALLOCATED TO k^{th} PVG PAIR p_{B_i} = BANDWIDTH REDUCTION FACTOR DUE TO THE i^{th} PORT p_{G_i} = BANDWIDTH INCREMENTAL FACTOR DUE TO THE i^{th} PORT f_k = BANDWIDTH REDUCTION CORRECTION FACTOR ASSIGNED TO THE k^{th} PVG PAIR e_k = BANDWIDTH INCREMENTAL CORRECTION FACTOR ASSIGNED TO THE k^{th} PVG PAIR $(1/\mu)$ = AVERAGE CALL HOLDING TIME T = BLOCKING THRESHOLD

21/23

FIG. 9B

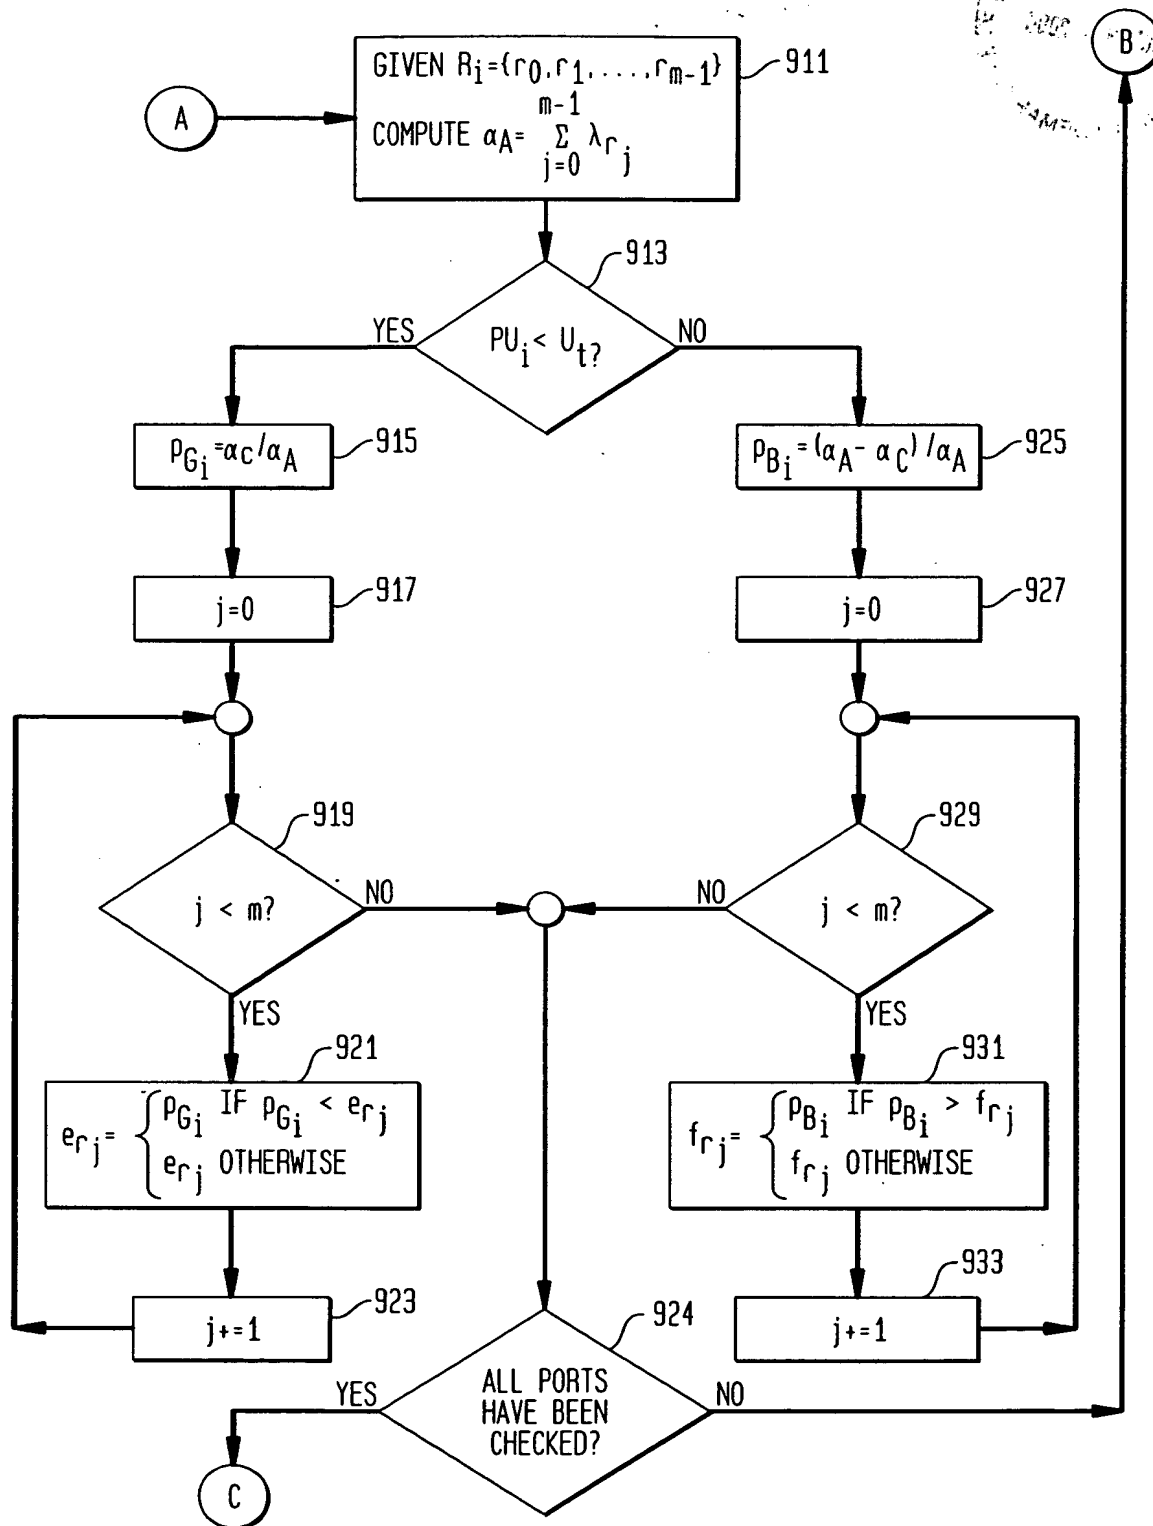

22/23

FIG. 9C

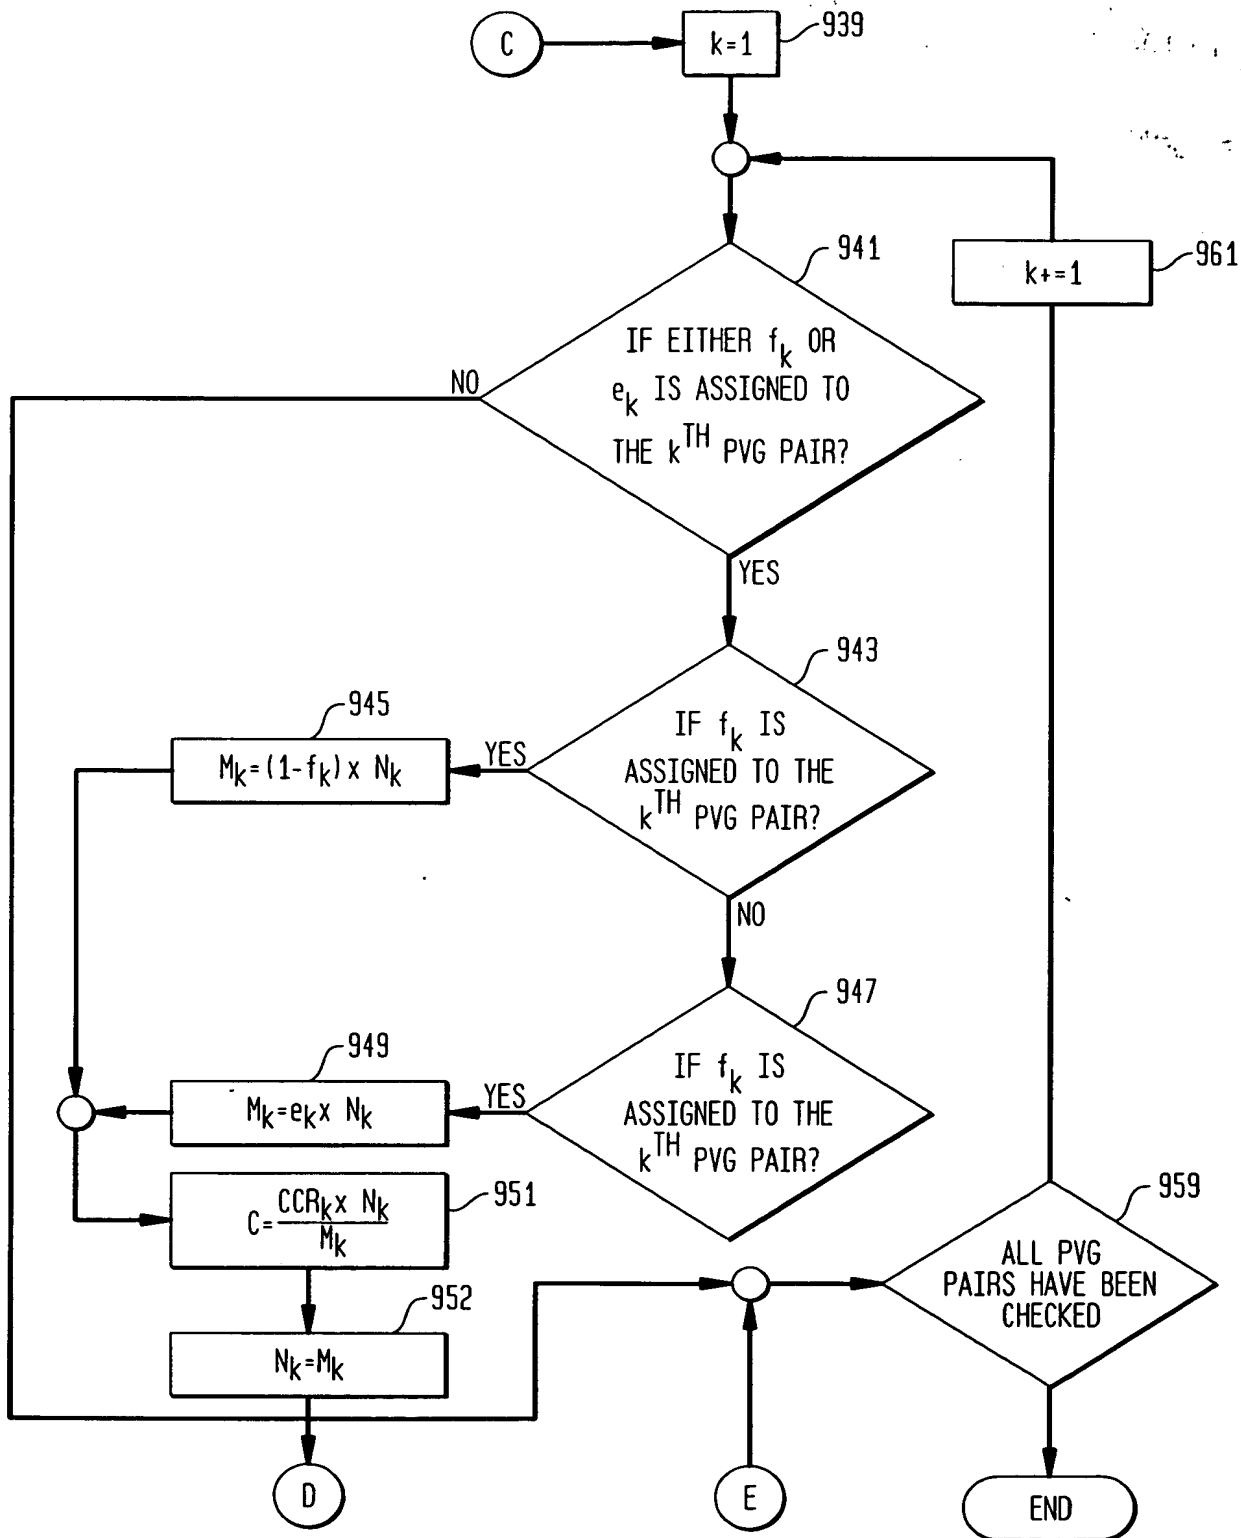


FIG. 9D

